



# 2025 PRODUCT GUIDE



Digital Catalog

**FORCOME**





# ABOUT US



## URIAH PRODUCTS IS A LEADER IN TRAILER REPAIR PARTS & TOWING ACCESSORIES.

Uriah Products, a division of FORCOME Group has been a leader in trailer repair parts and accessories for over 15 years. Our office and warehouse is located in Springfield, MO. Our key products and categories are designed in the U.S. and manufactured to our specific requirements in China and other Southeast Asian countries. Uriah is committed to providing our customers with the highest quality products and services at competitive prices.



## A TRUSTED BRAND COMMITTED TO QUALITY PRODUCTS AND INNOVATION

- Uriah invests in and prioritizes new product development
- We are proud to have multiple U.S. Registered Patents & Trademarks for our best selling brands including both utility and design patents.



## A TOTAL SOLUTION SUPPLIER FOR TRAILER PARTS & TOWING ACCESSORIES

Our products are found in retail stores across the United States and internationally. Our product line includes everything you need to keep your trailer in top condition, from jacks & couplers, hitch parts, trailer hardware, trailer electrical, trailer lighting, wheel & brakes, power winches, power jacks and more.

Our best-selling brand Aluma-Tow features a complete line of aluminum adjustable interchangeable hitches and accessories. This patented line of hitches has shaken up the aluminum adjustable hitch industry and we are proud to bring consumers a quality hitch with value added features.



## COLOR CODED PACKAGING FOR EASY SHOPPING AND MERCHANDISING

Our color coded and clear product packaging helps both store associates and consumers identify what they need quickly and easily.



## IN-HOUSE AFTER-SALES SERVICE

Our customer service team is staffed by US employees who are available to answer your questions and help you with any product issues during business hours Monday-Friday. Customers can also leave emails or voicemails during after-hours and we will respond within 1 business day. Here are just a few of the things our customer service team can help with:

- Answer technical questions about our products
- Help troubleshoot product issues
- Provide replacement parts

We also stock replacement parts here in the US, so we can quickly respond to your needs. We know that your time is valuable, and we are committed to providing you with the support you need to trust our brand and quality.



John



Andrew



Tim



Blain





# CONTENTS



Stocked and shipped  
from our U.S.  
Warehouse in  
Springfield, MO

Aluma-Tow	003
Aluma-Tow Accessories	006
Aluma-Tow Replacement Parts	007

Trailer Jacks	008
Jacks & Couplers	011
Towing	015
U-bolts & Hanger Parts	027



Wheel & Brake Parts	033
Trailer Hardware	039
Electrical Parts	045
Lighting	053
LED Lighting	071
Battery Accessories	077
Automotive Electrical	089





# ALUMINUM ADJUSTABLE HITCH SYSTEMS



Stocked and shipped  
from our U.S.  
Warehouse in  
Springfield, MO



ALUMA-TOW



Uriah Products® is committed to being a leader in the towing and trailer industry. The Aluma-tow adjustable hitch product line is a prime example of our commitment to providing our customers with top-quality products with practical features built-in that alleviate consumer problems. We promise to continue to deliver new and innovative products that help our customer tow safely and quickly whether they are leaving the construction site for the day or pulling into the boat landing for a long day of fishing.

Value added features:



Patented Interchangeable Hitch System



3 Interchangeable Hitch Balls  
1-7/8", 2" and 2-5/16"



2 Keyed Alike Locking Hitch Pins to Prevent Theft



12,000 lb. rated Towing Capacity (Using the 2-5/16" hitch ball)



Convenient Carrying Case for Storage  
\*Select Models



ALUMA-TOW-6" DROPS



Part #	Receiver Size	Drop	Rise	Body Material	Package Style	Locking Pins	Ball Size	GTWR	Ball Material
UT623800	2 in.	6 in.	6¾ in.	Aluminum w/ Black Oxide Coating	Plastic Carrying Case	2 Locking Pins included with 4 keyed - alike keys	1-7/8"	5000 lb.	Stainless Steel
							2"	7500 lb.	Stainless Steel
							2-5/16"	12,000 lb.	Stainless Steel



Part #	Receiver Size	Drop	Rise	Body Material	Package Style	Locking Pins	Ball Size	GTWR	Ball Material
UT623410	2 in.	6 in.	6¾ in.	Aluminum	Color Box	2 Locking Pins included with 4 keyed - alike keys	1-7/8"	5000 lb.	Chrome Plated Steel
							2"	7500 lb.	Chrome Plated Steel
							2-5/16"	12,000 lb.	Chrome Plated Steel
UT623900	2 in.	6 in.	6¾ in.	Aluminum	Carrying Case	2 Locking Pins included with 4 keyed - alike keys	1-7/8"	5000 lb.	Chrome Plated Steel
							2"	7500 lb.	Chrome Plated Steel
							2-5/16"	12,000 lb.	Chrome Plated Steel



ALUMA-TOW-8" DROPS




Part #	Receiver Size	Drop	Rise	Body Material	Package Style	Locking Pins	Ball Size	GTWR	Ball Material
UT623411	2 in.	8 in.	8¾ in.	Aluminum	Color Box	2 Locking Pins included with 4 keyed - alike keys	1-7/8"	5000 lb.	Chrome Plated Steel
							2"	7500 lb.	Chrome Plated Steel
							2-5/16"	12,000 lb.	Chrome Plated Steel
UT623911	2 in.	8 in.	8¾ in.	Aluminum	Carrying Case	2 Locking Pins included with 4 keyed - alike keys	1-7/8"	5000 lb.	Chrome Plated Steel
							2"	7500 lb.	Chrome Plated Steel
							2-5/16"	12,000 lb.	Chrome Plated Steel




Part #	Receiver Size	Drop	Rise	Body Material	Package Style	Locking Pins	Ball Size	GTWR	Ball Material
UT625810	2½ in.	8 in.	8 in.	Aluminum	Color Box	2 Locking Pins included with 4 keyed - alike keys	1-7/8"	5000 lb.	Chrome Plated Steel
							2"	7500 lb.	Chrome Plated Steel
							2-5/16"	12,000 lb.	Chrome Plated Steel
UT653910	2½ in.	8 in.	8 in.	Aluminum	Carrying Case	2 Locking Pins included with 4 keyed - alike keys	1-7/8"	5000 lb.	Chrome Plated Steel
							2"	7500 lb.	Chrome Plated Steel
							2-5/16"	12,000 lb.	Chrome Plated Steel

ADJUSTABLE & ROTATABLE ALUMINUM HITCH BALL MOUNT



UT623631



UT623360

**FITS STANDARD**

**2"**

RECEIVER

**2 BALL SIZES INCLUDED**

**2"**


10,000lb. GTWR  
Max. Capacity

**2<sup>5</sup>/<sub>16</sub>"**

15,000lb. GTWR  
Max. Capacity

**PATENT PENDING**

ALUMA-TOW ACCESSORIES

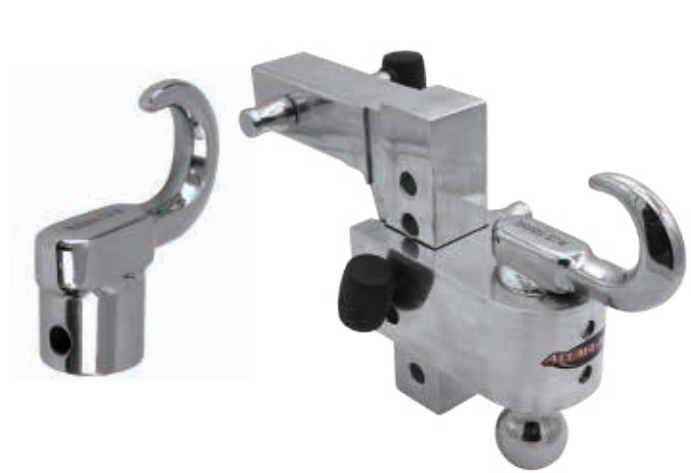

Part #	Description
UT623419	Aluma-Tow hook accessory

- Made of hardened carbon steel
- Hard chrome plated to resist corrosion
- 7,500 lb. max. pulling rating
- Fits all Aluma-Tow models
- Pulls stumps, fence posts and other objects form the ground



- Made of sturdy die-cast aluminum
- Equipped with a rubberized tread plate on both sides of the step.
- Has super bright, 11 inch long added LED brake light for added safety
- Comes with a 24 inch long 4-flat trailer electrical connector
- Simple to install in any Aluma-Tow model

Part #	Description
UT623550	Aluma-Tow step and brake light accessory

ALUMA-TOW REPLACEMENT PARTS

- Steel construction with Hard Chrome plating to resist corrosion
- With 3 3/4" of engagement length these keys will fit into any 2" or 2 1/2" square receiver
- Designed with a "snap lock" feature to allow it to lock without using the key
- The swivelhead locking mechanism allows the key to be inserted from the front to avoid having to find the key opening from the side of the lock
- Built-in key hole cover to prevent dirt and other objects from getting into the key hole



UT623417



UT623418

Part #	Description
UT623417	Replacement swivel locks, keyed alike
UT623418	Replacement stainless steel Aluma-Tow locks, keyed alike



ALUMA-TOW REPLACEMENT PARTS



UT623412      UT623413      UT623414

- Made of rust resistant chrome plated steel.
- Easily fits into any Aluma-Tow model in the upper or lower hitch-ball mounting hole.
- Hitch-ball security pin not included. You must use the pin that came with the Aluma-Tow when purchased.

Part #	Description	Towing Capacity
UT623412	Replacement Chrome Plated 1-7/8" hitch ball	5,000 lbs.
UT623413	Replacement Chrome Plated 2" hitch ball	7,500 lbs.
UT623414	Replacement Chrome Plated 2-5/16" hitch ball	12,000 lbs.



UT623422      UT623423      UT623424

- Made of rust proof 304 stainless steel.
- Easily fits into any Aluma-Tow model in the upper or lower hitch-ball mounting hole.
- Hitch-ball security pin not included. You must use the pin that came with the Aluma-Tow when purchased.

Part #	Description	Towing Capacity
UT623422	Replacement Stainless Steel 1-7/8" hitch ball	5,000 lbs.
UT623423	Replacement Stainless Steel 2" hitch ball	7,500 lbs.
UT623424	Replacement Stainless Steel 2-5/16" hitch ball	12,000 lbs.

TRAILER JACKS



UC200020      UC200030      UC250010      UC350020      UC500010

Our Advantage:  
Whether it's time to purchase your first trailer jack or upgrade to a new model, look no further than the latest releases from Uriah Products. We've been a leader in the trailer and towing industry for more than 15 years, and our latest jacks are our best work yet. With smarter, upgraded and patented technology, you'll spend less time cranking your trailer and more time enjoying wherever your journey takes you. Whether you opt for an electric jack or a manual model, these jacks are filled with new and improved features that make installation and operation a breeze. Discover which is right for you!

Specifications:

Item#	UC200020	UC200030	UC250010	UC350020	UC500010
Power Source	Manual Hand Crank or Drill (Not Included)	12V DC Electric Motor	12V DC Electric Motor	12V DC Electric Motor	12V DC Electric Motor
Waterproof Cover	No	Yes	Yes	Yes	Yes
Connector	N/A	Hard-Wired	Hard-Wired	Hard-Wired	7-Way Plug
Lift Capacity	2,000 lbs.	2,000 lbs.	2,500 lbs.	3,500 lbs.	5,000 lbs.
Clearance: Bracket to Jack Top	14 in	20 in.	20 in	24 in.	24 in.
Length Retracted	9 in.	9 in.	9 in.	9 in.	9 in.
Length of Travel	14 in.	14 in.	18 in.	22.5 in. (18 in. power, 4.5 in. drop leg)	22.5 in. (18 in. power, 4.5 in. drop leg)
Length Extended	23 in.	23 in.	27 in.	27 in., 4.5 in. drop leg	27 in., 4.5 in. drop leg
Drop Leg Travel	N/A	N/A	N/A	4.5 in.	4.5 in.
Jack Tube Outer Diameter	2.25 in.	2.25 in.	2.25 in.	2.25 in.	2.25 in.
Manual Override	Includes manual emergency crank	Includes manual emergency crank	Includes manual emergency crank	Includes manual emergency crank	Includes manual emergency crank
Ground Support	Foot plate	Foot plate	Foot plate	Foot plate	Foot plate
Mount Type	A-frame	A-frame	A-Frame	A-frame	A-frame
Mount Height	9 in.	9 in.	9 in.	9 in.	9 in.
LEDs	No	No	Yes	Yes	Yes
Trailer Type	Lightweight Trailers	Lightweight Trailers	Lightweight Trailers	Travel Trailer	Toy Haulers, Heavy Cargo Trailers







# JACKS & COUPLERS



Stocked and shipped  
from our U.S.  
Warehouse in  
Springfield, MO



JACK REPLACEMENT PARTS



Part #	Description	Fits These Jacks
UC800000	Top-wind jack handle	Fits Atwood, Shelby, Fulton and most A-frame top-wind jacks
UC800002	Top-wind jack handle	Fits most 5-8K top-wind drop leg & pipe mount jacks
UC818000	Trailer Jack Foot	Fits any 2 in. Diameter Jack
UC850010	Replacement Wheel and Pin	Most Jacks with 2 in. Dia. cylinder, 1,200 lb. capacity

COUPLERS

- Couplers feature:
- Zinc plating to reduce corrosion
  - Positive locking trigger
  - Bolt-on design
  - Adjustable lock nut for proper ball tension
  - Heavy duty latch & springs for maximum safety


Worn out couplers can be dangerous.  
Replace yours before it breaks!



Part #	Hitch Ball Size	Tongue Width	Capacity Rating	Class	Part Weight
UC178200	1 7⁄8 in.	2 in.	2,000 lbs.	I	3.0 lbs.
UC178250	1 7⁄8 in.	2 1⁄2 in.	2,000 lbs.	I	3.0 lbs.
UC200200	2 in.	2 in.	3,500 lbs.	II	4.2 lbs.
UC200250	2 in.	2 1⁄2 in.	3,500 lbs.	II	4.5 lbs.
UC200300	2 in.	3 in.	3,500 lbs.	II	4.5 lbs.
UC200301	2 in.	A-frame	5,000 lbs.	II	5.2 lbs.

COUPLER REPAIR PARTS

- Coupler repair kits:
- Are zinc plated to reduce corrosion
  - Include latch, spring, nut, and ball lock
  - Universal for all straight tongue and A-Frame couplers

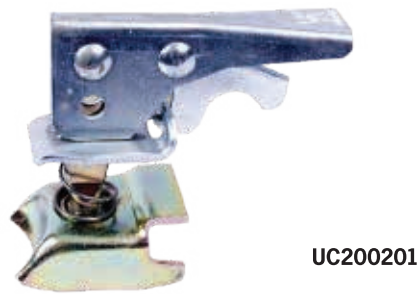


Part #	Description	Ball Size	Class	Fits These Couplers
UC178101	Coupler repair kit	1 7⁄8 in.	I	Shelby class I, universal design
UC200201	Coupler repair kit	2 in.	II	Shelby class II, universal design

COUPLER LOCK

- Coupler lock features:
- Heavy duty steel construction
  - Fits 2 in. yoke style & all straight tongue couplers
  - Chrome plating to reduce corrosion
  - Rubber cap to protect keyhole


Always lock your coupler  
before hauling any trailer!

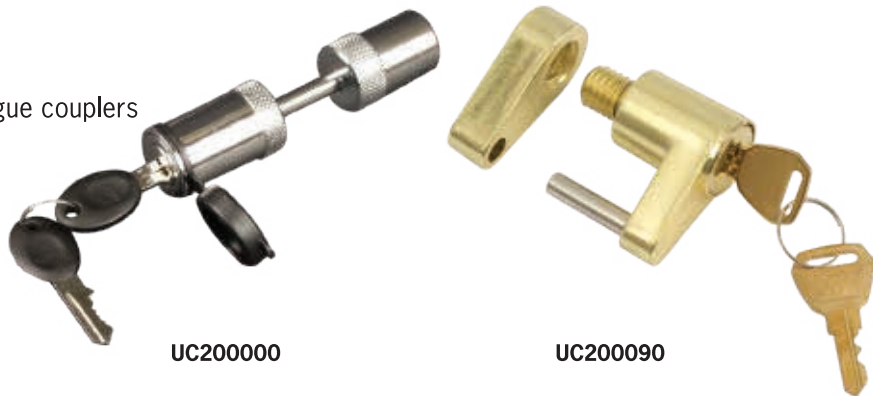

Part #	Description
UC200090	Trigger style coupler lock
UC200000	Coupler lock, 9⁄32 in. dia., 2 in. yoke style & all top latching couplers

REPLACEMENT PIN AND CHAIN

Part #	Description	Pin Diameter
UC800007	Spring pin and retainer for 2-pc. couplers and most drop leg jacks	5⁄16 in.

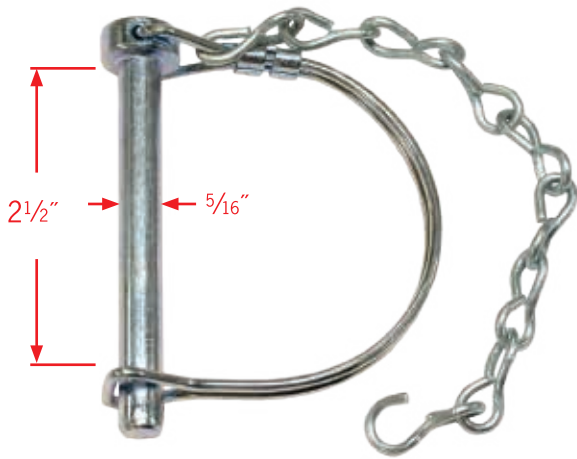





# TOWING




Stocked and shipped  
from our U.S.  
Warehouse in  
Springfield, MO



STANDARD AND CHROME PLATED BALL MOUNTS

- Both standard and chrome plated mounts are precision welded of high-strength premium steel
- Painted mounts are black enamel powder coated and baked-on for maximum corrosion resistance
- All have 5/8 in. hitch pin hole
- All have 1 in. hitch ball mounting hole
- Rating information is clearly labeled on each mount
- Fits standard 2 in. square receiver tube

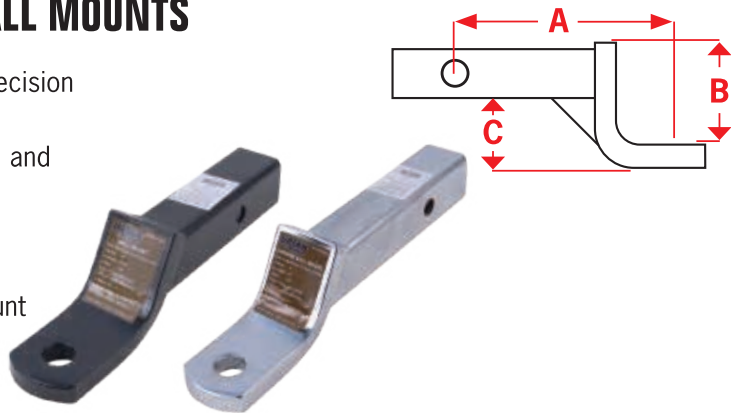

Part #	Description	Tongue wt. GTW Ratings	Hitch ball hole dia.	"A" Length	"B" drop distance	"C" rise distance
UT620002	Standard 2 in. drop ball mount	600/6,000 lbs.	1 in.	8½ in.	2 in.	1 in.
UT620004	Standard 4 in. drop ball mount	500/5,000 lbs.	1 in.	10¾ in.	4 in.	3 in.
UT620006	Standard 6 in. drop ball mount	500/5,000 lbs.	1 in.	11½ in.	6 in.	5 in.
UT620008	Standard 8 in. drop ball mount	500/5,000 lbs.	1 in.	10 in.	8 in.	6¾ in.
UT630004	Hard chrome plated 3¼ in. drop ball mount	500/5,000 lbs.	1 in.	10¾ in.	3¼ in.	2 in.

STARTER KITS



Part #	Description	Tongue GTW Ratings	Hitch ball hole dia.	"A" Length	"B" drop distance	"C" rise distance
UT620022	Baked-on Black Enamel starter kit	600/6,000 lbs.	2 in.	10 in.	2 in.	¾ in.
UT620023	Ball Mount Kit 2 Drop 17/8" Ball With Pin/	200/2,000 lbs.	1 7/8 in.	8 in.	2 in.	1 in.
UT620033	Ball Mount Kit 2 Drop 25/16" Ball Pin/Clip	600/6,000 lbs.	2-5/16 in.	8 in.	2 in.	1 in.
UT620044	Ball Mount Kit 4 Drop 2" Ball With Pin/Clip	500/5,000 lbs.	2 in.	10 in.	4 in.	3 in.
UT620054	Ball Mount Kit 4 Drop 25/16 Ball Pin/Clip	500/5,000 lbs.	2-5/16 in.	10¼ in.	4 in.	2½ in.

DUAL-BALL BALL MOUNTS


- Black powder coat painted
  - 1⅞ in. and 2 in. or 2 in. and 2⅝ in. ball diameters welded in place
  - Hollow shank for up to 7,500 lb. GTW rating
  - Ratings clearly labeled for each ball diameter
- Each ball clearly stamped with rating information
  - Simply rotate the mount for desired ball diameter
  - No need to carry multiple ball mounts



Part #	Description
UT620301	Dual ball mount with 1⅞ in. ball with 2,000 lbs. GTW and 2 in. hitch ball with 5,000 lbs. GTW
UT620302	Dual ball mount with 2 in. ball with 5,000 lbs. GTW and 2⅝ in. hitch ball with 7,500 lbs. GTW

HEAVY DUTY BALL MOUNTS

- All are Class V rated with solid 2 in. square shank
- All have 1¼ in. hitch ball mounting hole
- Painted mounts are black enamel powder coated and baked-on for maximum corrosion resistance
- All have 1/8 in. hitch pin mounting hole
- Rating information is clearly labeled on each mount
- Fits standard 2 in. square receiver tube

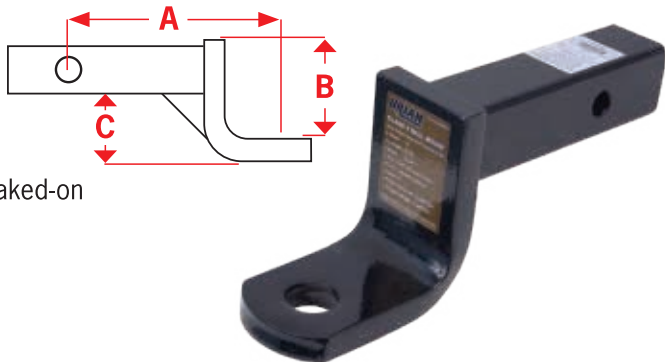


Part #	Description	Tongue/ GTW Ratings	Hitch ball Hole Dia.	"A" Length	"B" Drop Distance	"C" Rise Distance
UT620007	Heavy duty 6 in. drop Ball Mount	1,200/12,000 lbs.	1¼ in.	9½ in.	6 in.	4¾ in.





CLASS I/II BALL MOUNTS

- Precision welded of high-strength premium steel
- Black enamel powder coated and baked-on for maximum corrosion resistance
- All have ½ in. hitch-pin hole
- All have ¾ in. hitch-ball mounting hole
- Rating information is clearly labeled on each mount
- Fits standard 1 ¼ in. square receiver tubes seen on many cars and light SUVs

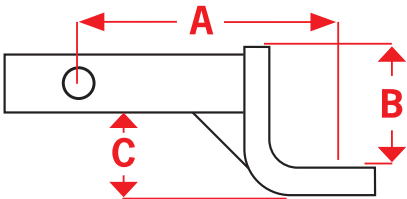

UT620090



UT620095



Part #	Description	Tongue/ GTW Ratings	Hitch ball Hole Dia.	“A” Length	“B” Drop Distance	“C” Rise Distance
UT620090	Class I/II 2 7⁄8 in. drop ball mount	350/3,500 lbs.	¾ in.	7 5⁄8 in.	2 7⁄8 in.	2 ¼ in.
UT620095	Class I/II 1 ¼ in. drop ball mount	350/3,500 lbs.	¾ in.	6 5⁄8 in.	1 ¼ in.	5⁄8 in.

CLASS V BALL MOUNT

- Class V-rated ball mount hitch fits oversized 2.5" square receivers
- High-strength steel and corrosion-resistant finish for excellent durability
- Pin and hitch ball not included



UT625023



UT625025




UT625027

Part #	Description	Tongue/ GTW Ratings	Hitch ball Hole Dia.	“A” Length	“B” Drop Distance	“C” Rise Distance
UT625023	Ball Mount Heavy Duty 2 ½" Sqr W/3" Drop	1,200/12,000 lbs.	1 ¼ in.	9 in.	3 in.	1 ½ in.
UT625025	Ball Mount Heavy Duty 2 ½" Sqr W/5" Drop	1,200/5,000 lbs.	1 ¼ in.	6 ½ in.	5 in.	3 ½ in.
UT625027	Ball Mount Heavy Duty 2 ½" Sqr W/7" Drop	1,200/12,000 lbs.	1 ¼ in.	9 in.	7 in.	5 ½ in.

CLEVIS MOUNT

- Precision welded of high-strength premium steel
- Black enamel powder coated and baked-on for maximum corrosion resistance
- 5⁄8 in. hitch-pin hole
- Fits standard 2 in. square receiver tube
- Clevis cross hole fits standard 1 in. Pin
- Rating information is clearly labeled on each mount



Part #	Description	Tongue/ GTW Ratings	Cross Hole Dia.	“A” Width	“B” Width	“C” Depth
UT680010	Heavy duty clevis mount	600/6,000 lbs.	1 in.	8 ¾ in.	2 in.	2 ½ in.

TRI-BALL BALL MOUNTS

- Chrome plated or black powder coat painted
- 1 7⁄8 in., 2 in. and 2 5⁄16 in. dia. balls welded in place
- Solid shank for up to 10,000 lb. GTW rating
- Ratings clearly labeled for each ball diameter
- Each ball clearly stamped with rating information
- Simply rotate the mount for desired ball diameter
- No need to carry multiple ball mounts



UT620320




UT620300

Part #	Description GTW Ratings:
UT620300	Tri-ball mount, black, with one 1 7⁄8 in. ball with 2,000 lbs. GTW, one 2 in. ball with 6,000 lbs. GTW, and one 2 15⁄16 in. ball with 10,000 lbs. GTW
UT620320	Tri-ball mount, chrome, with one 1 7⁄8 in. ball with 2,000 lbs. GTW, one 2 in. ball with 6,000 lbs. GTW, and one 2 15⁄16 in. ball with 10,000 lbs. GTW




ADJUSTABLE STANDARD SINGLE-BALL MOUNT

- Precision welded with high-grade steel
- Black powder coated and baked-on enamel finish for maximum corrosion resistance
- 5/8 in. hitch-pin hole, 1 in. dia. ball hole
- 2-pin mount design for maximum stability and safety
- Over 17 in. combined of adjustable rise and drop travel in 1 in. increments
- Includes (2) 5/8 in. dia. pins and clips
- Fits standard 2 in. square receiver tube
- 6,000 max. GTW rating/ 600 lbs. max. tongue rating
- Packaged in 4-color graphic box with UPC

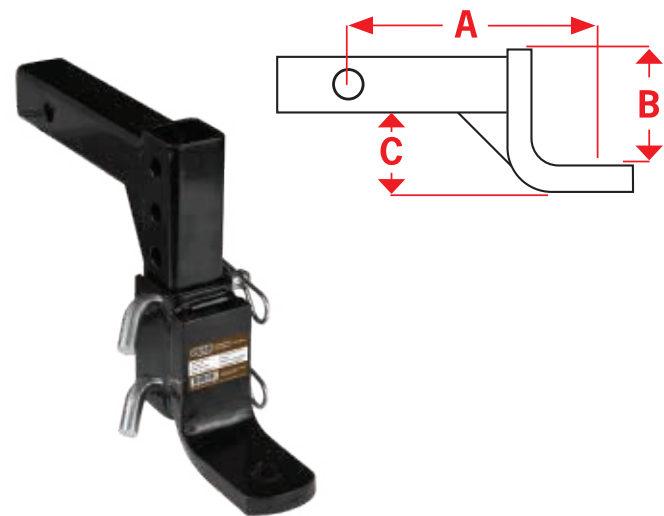

Part #	Description	Tongue/ GTW Ratings	"A" Length	"B" Max Drop	"C" Max Rise
UT620315	Adjustable single ball mount	600/6,000 lbs.	12 in.	9 1/8 in.	7 7/8 in.

DUAL MOUNTS

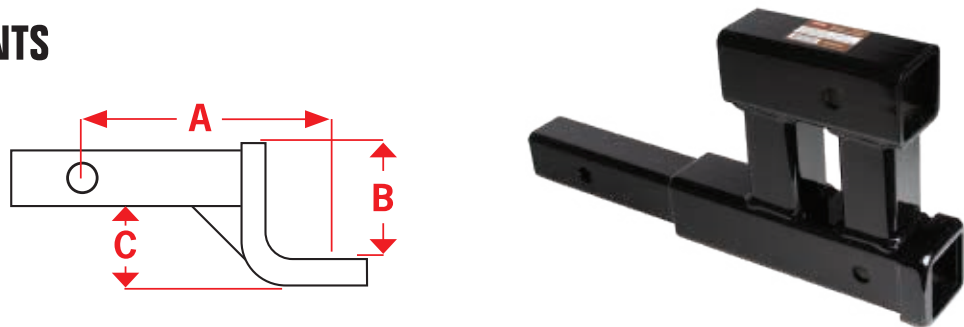

Part #	Description	Tongue/ GTW Ratings	"A" Length	"B" Max Drop	"C" Max Rise
UT620125	Converts (1) 2 in. receiver into (2) 2 in. receivers	500/4,000 lbs.	n/a	n/a	n/a

RECEIVER TUBES

- Pre-painted to resist corrosion
- Weldable steel construction
- For use with 2 in. square ball mounts
- 5/8 in. hitch pin hole



Part #	Description	Length
UT620060	2 in. square receiver tube	6 in.
UT620120	2 in. square receiver tube	12 in.

RECEIVER TUBES



- Allows oversized 2.5" square receivers to accept 2" square ball mounts
- Steel construction and corrosion-resistant finish for excellent durability
- Uses standard 5/8" diameter hitch pin (not included)
- Easily installs into your vehicle's 2.5" receiver tube

Part #	Description	Length
UT625090	Receiver Adaptor – adapts a 2-1/2" receiver square to a 2" receiver square	6"

PINTLE HOOKS AND COMBO PINTLES

- Choice of forged pintle (20% smaller) or cast pintle
- Combo pintles with 2 in. or 2 5/16 in. ball diameter
- Combo pintles are precision welded of high strength steel
- All are equipped with latch and safety chain
- Black baked-on powder coated paint for maximum corrosion resistance
- Fit standard pintle mounts using four bolts
- Rating information is clearly labeled on each part
- Combo pintles have hard chrome plated hitch balls




Part #	Description	GTW Ratings
UT712200	Pintle combo with 2 in. ball	16,000 lbs.



PINTLE MOUNTS

- All mounts are made with solid 2 in. steel shanks
- Mounting surface is made from 1 1/2 in. thick high strength steel
- All are painted with powder coated baked on black enamel
- Extra bracing is added where needed for maximum strength
- 5/8 in. hitch-pin hole
- Precision welded construction

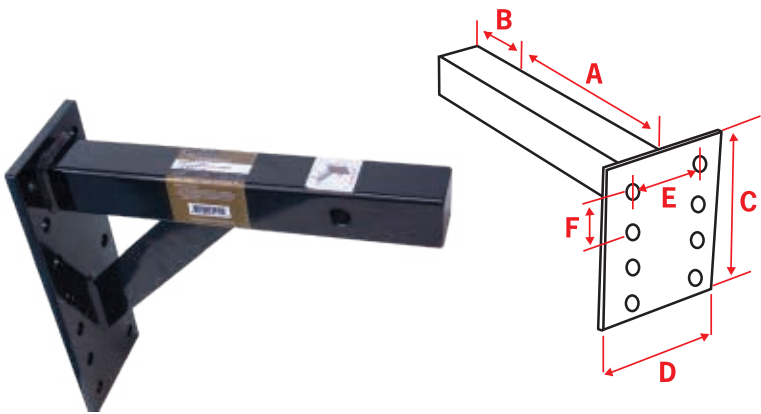

Part #	Description	Rating	A	B	C	D	E	F
UT690400	Pintle mount with 8 mounting holes	10,000 lbs.	7 in.	3 1/4 in.	7 1/2 in.	5 in.	3 3/8 in.	1 3/4 in.



HITCH ADAPTERS

- Precision welded of high-strength premium steel
- Black enamel powder coated and baked-on for maximum corrosion resistance
- Both have 1/2 in. pin hole and 5/8 in. pin hole
- Rating information is clearly labeled
- Fits standard 2 in. or 1 1/4 in. square receiver tubes
- UT620122 has solid 1 1/4 in. shank
- Designed for use with hitch accessories and not for towing

Part #	Description	Pin to Pin Distance	1 1/4" Shank Pin Hole Dia	2" Shank Pin Hole Dia.	Overall Length
UT620122	1 1/4 in. to 2 in. receiver tube adapter	7 7/16 in.	1/2 in.	5/8 in.	11 in.
UT620221	2 in. top 1 1/4 in. receiver tube adapter	7 in.	1/2 in.	5/8 in.	11 5/8 in.




HITCH BALLS

Hitch balls feature:

- Chrome plating to resist corrosion
- Wrench flats for easy installation and removal
- Precision machined for a perfect fit
- Available in a wide variety of sizes to suit any application
- Lock washers to ensure a secure and safe installation
- Hard plastic case for convenient storage

Part #	G.T.W. Rating	"A" Diameter	"B" Diameter	"C" Length
UT187510	2,000 lbs.	1 7/8 in.	1 in.	2 in.
UT187575	2,000 lbs.	1 7/8 in.	3/4 in.	2 1/2 in.
UT210025	5,000 lbs.	2 in.	1 in.	2 1/2 in.
UT275025	3,500 lbs.	2 in.	3/4 in.	2 1/2 in.
UT212501	6,000 lbs.	2 in.	1 1/4 in.	2 1/2 in.
UT231220	5,000 lbs.	2 5/16 in.	1 in.	2 in.
UT231225	7,500 lbs.	2 5/16 in.	1 1/4 in.	2 1/4 in.
UT275125	3,500 lbs.	2 in.	3/4 in.	2 in.

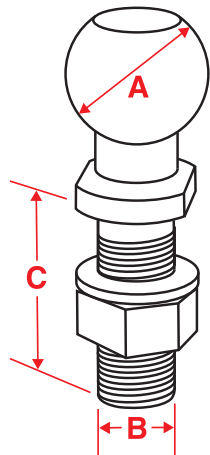

HITCH BALL MOUNT



UT623100

Part #	Description	Specs
UT623100	2 Ball Aluminum Adjustable Hitch Ball Mount - Uriah Brand	-6" Drop / 6" Rise -Reversible/Adjustable Aluminum Ball Mount -Fits Standard 2" Receiver -Includes 2 balls (SAE J684 certified) 2" ball: 7500lbs. GTWR 2-5/16" ball 7500 lbs. GTWR -Includes 2 standard pins (non-locking)

STEEL TOW

- Features dual balls (2" & 2-5/16")
- Fits standard 2" square receiver or 2-1/2" square with optional adapter (not included)
- Adjustable in 1" increments
- Precision welded for maximum strength
- Solid steel hard-chrome plated hitch balls to reduce corrosion
- Hitch pin & clip included
- Includes 2 steel connector pins for increased stability
- Anti-rattle pad added to prevent the start & stop "clang"
- Independently tested to meet or exceed SAE J684 standards

Part #	Description	Drop	Rise	GTWR 2" Ball	GTWR 2-5/16"	Max Tongue Weight	Receiver Size
UT623510	Steel Tow 5 Adjustable Steel Dual Ball Mount	3"	5"	7500 lb.	10,000 lbs.	1200 lb.	2"
UT623810	Steel Tow 8 Adjustable Steel Dual Ball Mount	8"	8"	7500 lb.	10,000 lbs.	1200 lb.	2"



UT623810

UT623510

Either use both logos for each model or don't include either.






HITCH PINS

Locking hitch pins features:


- Chrome plating to resist corrosion
- Key protection boot to resist dirt and grit
- Lubricated lock for easy operation
- Precision machined for high quality
- Includes 2 keys

Standard hitch pins feature:


- Zinc plating to resist corrosion
- Chamfered clip hole for easy installation
- Heat treated for strength
- Precision machined for perfect fit

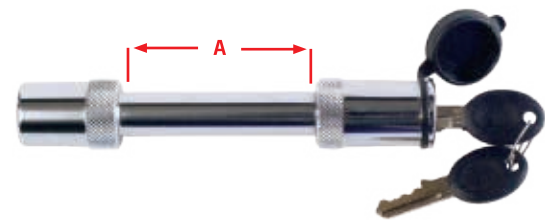

UT205810



UT500030

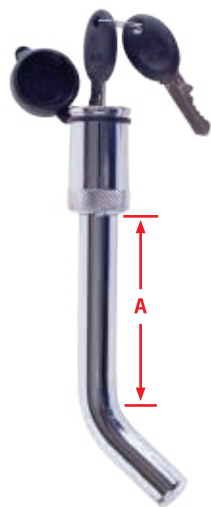


UT205800

Part #	Description	Pin Diameter	Receiver Opening	“A” Length
UT205810	"Dog bone" style locking hitch pin	5⁄8 in.	2 sq. in.	3 in.
UT205800	Standard style locking hitch pin	5⁄8 in.	2 sq. in.	3 in.
UT500030	Standard hitch pin	1⁄2 in.	1¼ sq. in.	2¾ in.
UT625030	Standard hitch pin	5⁄8 in.	2 sq. in.	3 in.
UT500020	Standard style locking hitch pin	1⁄2 in.	1¼ in.	2¾ in.

- Unique swivel head design
- Sliding key cover
- Automatic lock mechanism when swivel head is snapped on



Part #	Description	Pin Diameter	Receiver opening	“A” Length
UT205808	Swivel head locking hitch pin	5⁄8 in.	2 sq. in.	3 in.

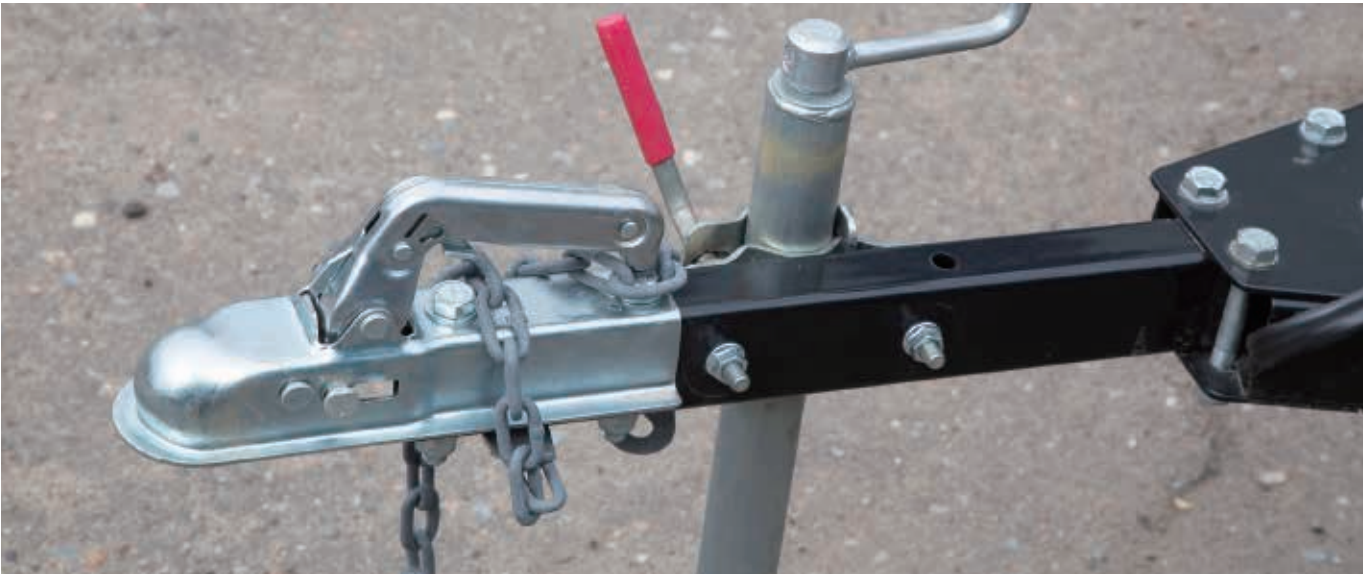

SAFETY CHAINS

UT200196




UT200195




Part #	Minimum Breaking Strength	Total Length	Link Diameter	Hook Diameter	Hook Opening
UT200195	7,600 lbs	30 in.	5⁄16 in.	¼ in.	1¹⁄16 in.
UT200196	3,000 lbs	36 in.	3⁄16 in.	3⁄8 in.	¾ in.
UT200197	5,000 lbs	36 in.	¼ in.	7⁄16 in.	7⁄8 in.

“S” HOOKS AND QUICK LINKS

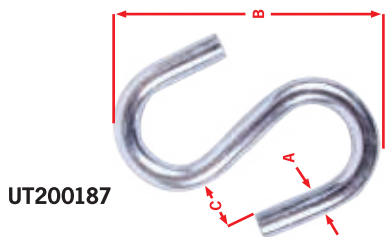

UT200187



UT200188

Part #	Description	Working Load Limit	Min. Breaking Strength	“A” Diameter	“B” Length	“C” Length
UT200187	“S” hooks for 3⁄8 in. chain (Qty. 2)	800 lbs.	2,000 lbs.	3⁄8 in.	3 in.	¾ in.
UT200188	“S” hooks for 3⁄8 in. chain (Qty. 2)	1,200 lbs.	3,000 lbs.	3⁄8 in.	3½ in.	¾ in.
UT200189	“S” hooks for 7⁄16 in. chain (Qty. 2)	2,500 lbs.	5,000 lbs.	7⁄16 in.	4 in.	7⁄8 in.






# U-BOLTS & HANGER PARTS




Stocked and shipped  
from our U.S.  
Warehouse in  
Springfield, MO



TYPICAL AXEL HANGER CONFIGURATION

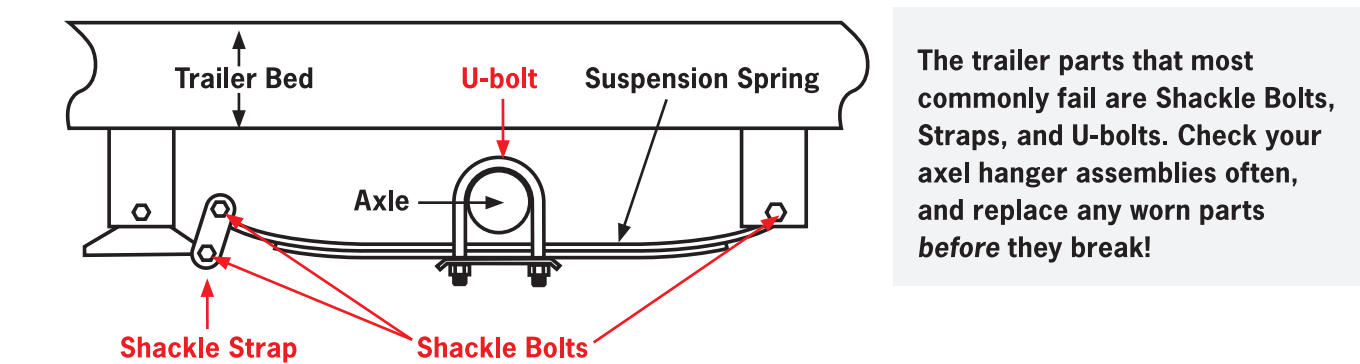

U-BOLTS

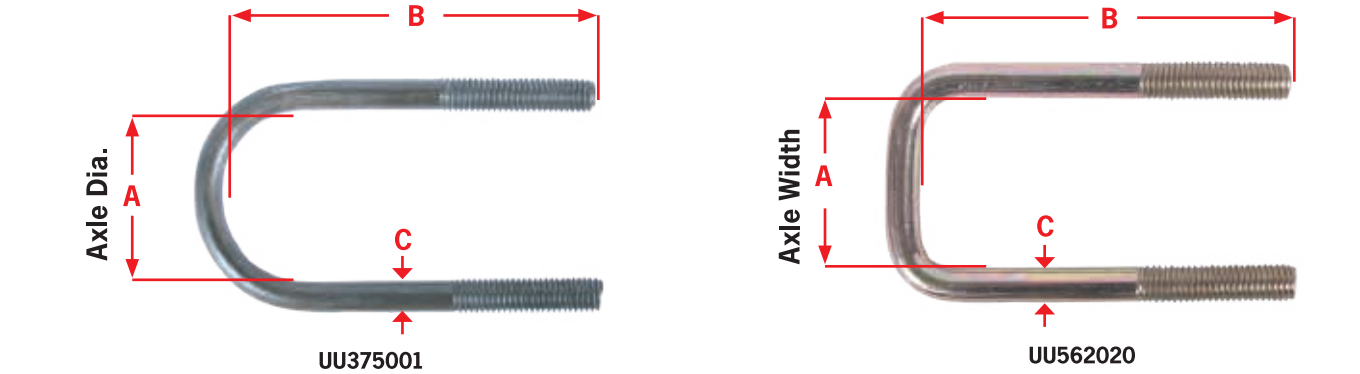

Part #	Description	Style	"A"	"B" Length	"C" Diameter
UU375001	U-bolts & nuts (Qty 2)	Round	1¾ in.	4¾ in.	¾ in.
UU500001	U-bolts & nuts (Qty 2)	Round	2¾ in.	5½ in.	½ in.
UU500007	U-bolts & nuts (Qty 2)	Round	3 in.	7 in.	½ in.
UU562030	U-bolts & nuts (Qty 2)	Round	3 in.	7¼ in.	⅝ in.
UU500005	U-bolts & nuts (Qty 2)	Square	1½ in.	5 in.	½ in.
UU500008	U-bolts & nuts (Qty 2) - zinc plated	Square	2 in.	5¼ in.	½ in.
UU438001	U-bolts & nuts (Qty 2) - zinc plated	Square	2 in.	4 in.	⅞ in.
UU438002	U-bolts & nuts (Qty 2) - zinc plated	Square	3 in.	4 in.	⅞ in.
UU562020	U-bolts & nuts (Qty 2)	Square	2 in.	5½ in.	⅝ in.
UU562030	U-bolts & nuts (Qty 2)	Square	1¾ in.	5 in.	⅝ in.
UU375002	U-bolt kit with 2 nuts and 4 bolts	Square	4 in.	4 in.	¾ in.

SHACKLE STRAPS & SHACKLE BOLTS

Diagram showing dimensions A, B, and C for shackle straps and shackle bolts. Part # UW562030 is shown with dimensions A, B, and C. Part # UW562100 is shown with dimensions B and C.

Part #	Description	"A" Length	"B" Length	"C" Diameter
UW562030	Shackle straps (Qty 4)	1¼ in.	2¼ in.	⅝ in.
UW562040	Shackle straps (Qty 4)	1¼ in.	2⅝ in.	⅝ in.
UW562050	Shackle straps (Qty 4)	1¼ in.	3⅝ in.	⅝ in.
UW562100	Bolts for 1¾ in. springs (Qty. 4)	n/a	3 in.	⅝ in.
UW562200	Bolts for 2 in. springs (Qty. 4)	n/a	3½ in.	⅝ in.

LEAF SPRINGS

Diagram showing dimension A for a leaf spring.

Part #	Description	Style	Capacity	Width	"A" Length
UU353000	Leaf spring - 4 leaf	Double Eye	2,500 lbs.	1¾ in.	25 in.
UU629000	Leaf spring - 3 leaf	Double Eye	1,000 lbs.	1¾ in.	23¾ in.
UU504000	Leaf spring - 4 leaf	Double Eye	1,750 lbs.	1¾ in.	25¼ in.


HANGER PARTS

Diagram showing dimensions A, B, and C for hanger parts. Part # UWAPS300 is shown with dimensions A, B, and C.


Part #	Description	Front hang-er	Rear hanger	Shackle strap	Shackle bolt/nut
UWAPS300	Spring hanger kit, weld-on for single axle double eye and 1 ¾ in. springs	UU507000 (2)	UU656000-1 (2)	UW562050 (4)	UU562100 (6)
UU644000	Spring hanger kit, weld-on for single axle double eye and 1 ¾ in. springs	UU506001 (2)	UU656000-1 (2)	UW562050 (4)	UU562100 (6)



HANGER PARTS

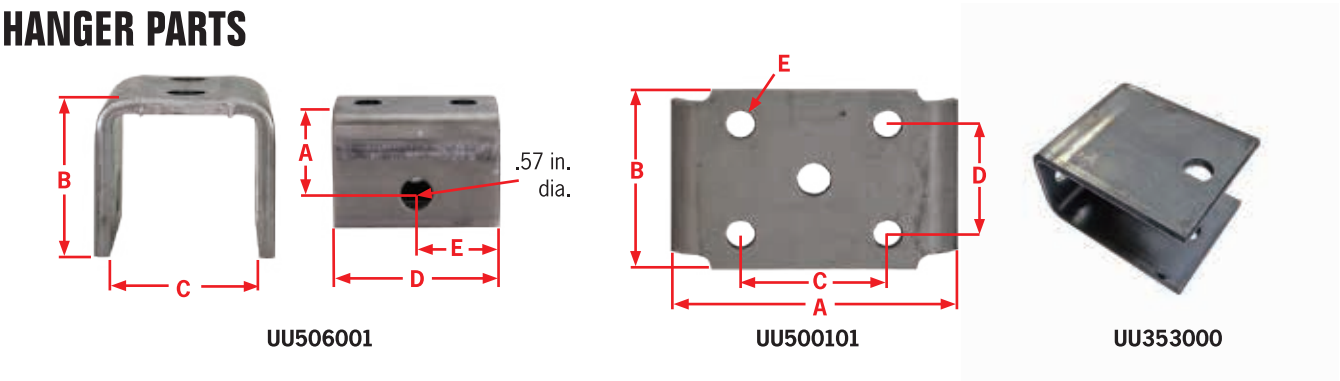

Part #	Description	A	B	C	D	E
UU506000	Rear spring hanger for 1¾ in. springs	1 in.	2.25 in.	1.30 in.	3.00 in.	1.50 in.
UU506001	Front or rear hanger for 1¾ in. springs	1.12 in.	2.13 in.	1.88 in.	3.00 in.	1.50 in.
UU507000	Front, center or rear hanger	3.25 in.	3.87 in.	1.88 in.	3.00 in.	1.50 in.
UU500101	Spring tie plate	5.92 in.	3.75 in.	2.94 in.	2.31 in.	.66 in.
UU353000	Small rear spring hanger	1 in.	2 in.	1.50 in.	1.50 in.	

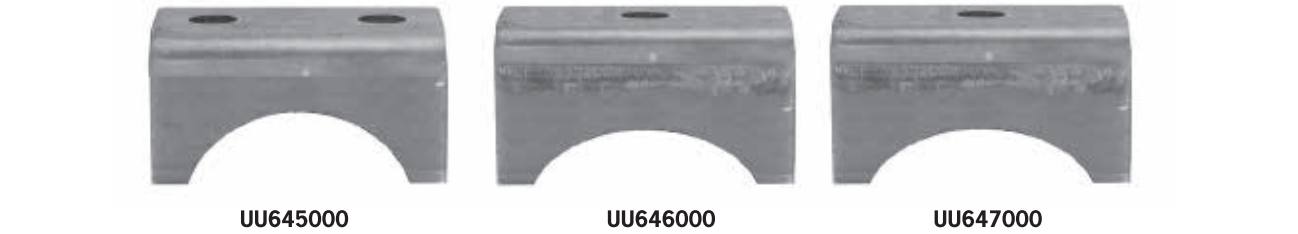

Part #	Description
UU645000	Weld-on trailer spring seat, 2000-Lb. axles
UU646000	Weld-on trailer spring seat, 3500-Lb. axles
UU647000	Weld-on trailer spring seat, 5200-Lb. axles



Part #	Description
UU648000	Trailer spring tie plate, for 2,000 lb axles, made of cold rolled steel, used with 3/8" diameter U-Bolts on 2" axle.
UU650000	Trailer spring tie plate, for 5,200 lb axles, made of cold rolled steel, used with 3/8" diameter U-bolts on 2" axle.

SPRING BUSHINGS



Part #	Description	Fits	I.D.	O.D.	Length
UU562220	Nylon spring bushings (Qty 6)	1¾ in. Leaf Spring	⅝ in.	1¼ in.	1¾ in.
UU562240	Nylon spring bushings (Qty 6)	2 in. Leaf Spring	⅝ in.	1¼ in.	2 in.

CAST EQUALIZER




Part #	Description	Width	"A" Length	"B" Length	"C" Diameter
UU510000	Cast equalizer	1¾ in.	7¾ in.	2⅞ in.	⅝ in.





# WHEEL & BRAKE PARTS

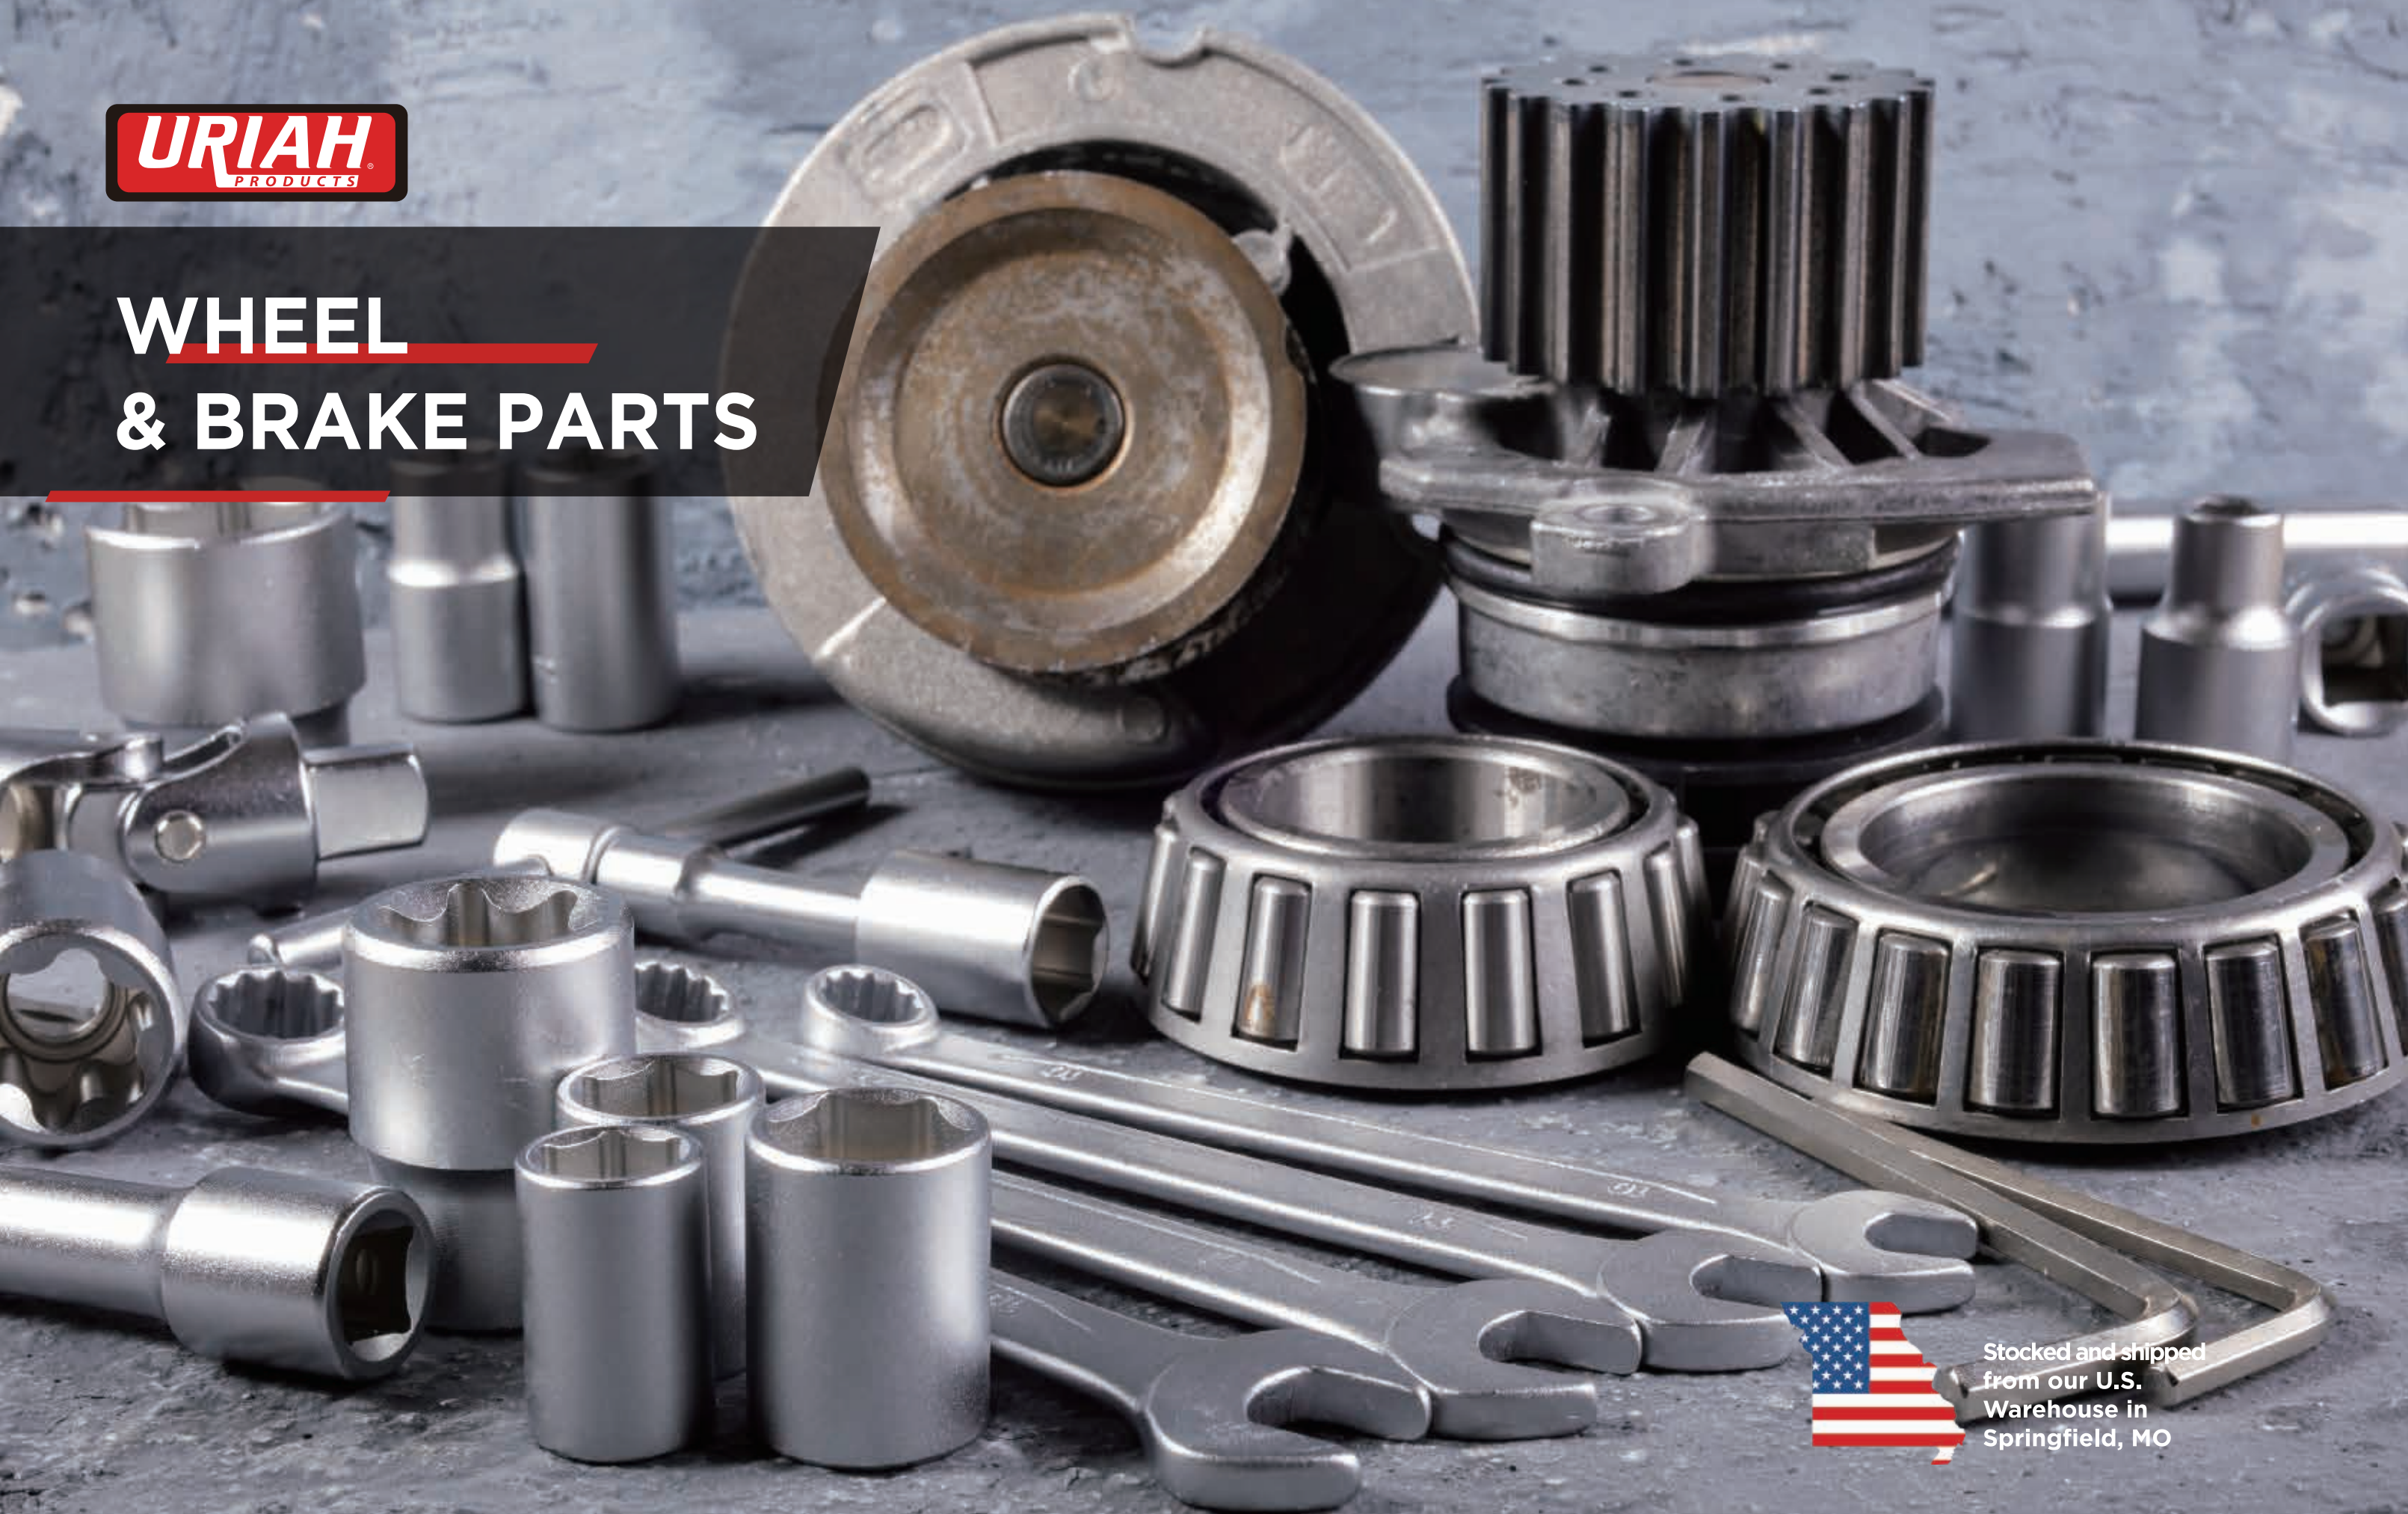

Stocked and shipped  
from our U.S.  
Warehouse in  
Springfield, MO



REPLACEMENT HUB KITS




Part #	Description	Bolt Circle	Weight	Type
UW000150	Hub Kit, 4 bolt, 1 in. inner and outer bearings	4 in.	1,250 lbs.	BT8
UW000155	Hub Kit, 5 bolt, 1 1⁄6 in. inner and outer bearings	4½ in.	1,250 lbs.	BT16
UW000545	Hub Kit, 5 bolt, 1 1⁄6 in. outer, 1 3⁄8 inner bearings	4½ in.	1,750 lbs.	#84

WHEEL BEARINGS




Part #	Application
UW150020	Bearing and race replacement for 44649 bearing, 1.062 in. ID, L44610 race
UW200030	Bearing and race replacement for L-68149 bearing, 1.378 ID, L-68111 race, 2.3612 ft. race O.D

SEALS

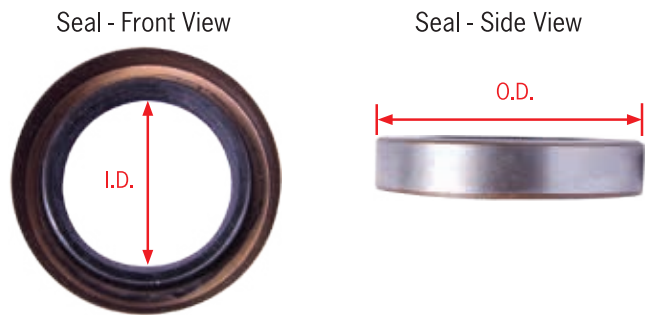

Part #	Application
UW100110	Grease seal, replacement 1.249 in. I.D., 12192TB (bulk) (Qty.2)
UW100111	Grease seal, replacement 1.249 in. I.D., 12192TB (Qty.1)
UW150010	Grease seal, replacement 1.500 in. I.D., 10-60 (Qty.2)
UW150011	Grease seal, replacement 1.500 in. I.D., 10-60 (Qty.1)
UW210010	Grease seal, replacement 1.719 in. I.D., 10-19 (Qty.2)
UW210011	Grease seal, replacement 1.719 in. I.D., 10-19 (Qty.1)

WHEEL BEARING KITS

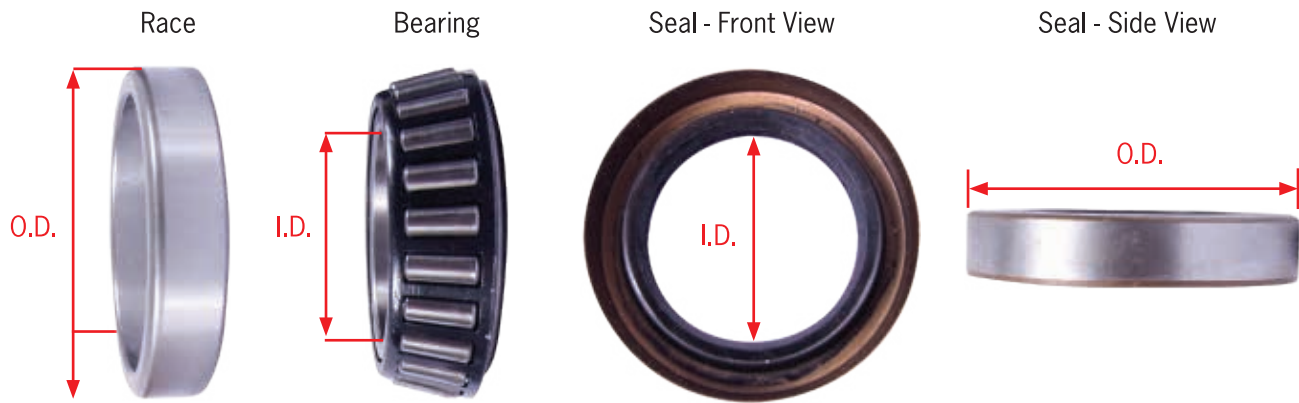

Part #	Description	Dimensions	Application
UW100100	Single wheel kit - includes:	—	1in. BT8 spindles
	· 2 Bearings (1 inner, 1 outer)	1 in. I.D.	1in. BT8 spindles
	· 2 Races (1 inner, 1 outer)	1.980 in. O.D.	1in. BT8 spindles
	· 1 Seal	1.249 in. I.D., 1.983 in. O.D.	Most 1in. BT8 spindles
	· 1 Cotter pin	½ in. x 1¾ in.	Most spindles
UW150000	Single wheel kit - includes:	—	1½ in. BTR spindles
	· 2 Bearings (1 inner, 1 outer)	1½ in. I.D.	1½ in. BTR spindles
	· 2 Races (1 inner, 1 outer)	1.980 in. O.D.	1½ in. BTR spindles
	· 1 Seal	1.500 in. I.D., 1.987 in. O.D.	Most 1½ in. BTR spindles
	· 1 Cotter pin	½ in. x 1¾ in.	Most spindles
	· 1 D-Washer	1 in. I.D.	All 1 in.–14 threaded ends
UW210000	Single wheel kit - includes:	—	#84 spindles
	· 1 Outer bearing	1½ in. I.D.	#84 spindles
	· 1 Outer race	1.980 in. O.D.	#84 spindles
	· 1 Inner bearing	1.378 in. I.D.	#84 spindles
	· 1 Inner race	2.565 in. O.D.	#84 spindles
	· 1 Seal	1.719 in. I.D., 2.565 in. O.D.	Most #84 spindles
	· 1 Cotter pin	½ in. x 1¾ in.	Most spindles
	· 1 D-Washer	1 in. I.D.	All 1 in.–14 threaded ends




SPINDLE PARTS



EZ Lube Style



UW700010



Standard Style

Part #	Description	Size
UW700010	Plugs for EZ Lube grease caps (Qty. 2)	n/a
UW700020	Standard drive-in grease caps (Qty. 2)	1.986 in. O.D.
UW700030	EZ Lube style drive-in caps with plugs (Qty. 2)	1.986 in. O.D.
UW700040	Standard drive-in grease caps (Qty. 2)	2.44 in. O.D.
UW700045	EZ Lube style drive-in caps with plugs (Qty. 2)	2.44 in. O.D.
UW700050	Standard drive-in grease caps (Qty. 2)	2.72 in. O.D.
UW700055	EZ Lube style drive-in caps with plugs (Qty. 2)	2.72 in. O.D.

BEARING PROTECTORS

Bearing Protectors:

- Keep bearings from becoming overloaded with grease
- Keep excess grease from spattering onto wheels
- Are chrome plated to resist corrosion
- Are precision machined for perfect press fit
- Come with rubber covers to protect fittings
- Are perfect for marine applications



Part #	Description	Replaces
UW700070	Set of 2 bearing protectors and rubber covers. Fits 1.98 in. diameter hubs with L44610 outer race.	Redline RG07-040
UW700071	Replacement Rubber cover set	n/a

WHEEL BOLTS & WHEEL NUTS



UW800020



UW500010




UW500030



Part #	Description	Size
UW500011	Wheel nut - 90° cone	9/16 in. I.D.
UW500015	Wheel bolt - 1 in. long, 90° cone	1/2 in. O.D.
UW500040	Drive-in wheel studs - 1 3/8 in. long	1/2 in. O.D.
UW500050	Drive-in wheel studs - 1 3/4 in. long	1/2 in. O.D.
UW500010	Wheel nut - 60° cone	1/2 in. I.D.
UW500030	Wheel bolt - 7/8 in. long, 60° cone	1/2
UW800020	Spindle nut - 14 TPI, 1 in. Dia.	1 in. I.D.
UW562010	Wheel bolt - 1 1/8 in. long, 90° cone	9/16 in. O.D

SPINDLES

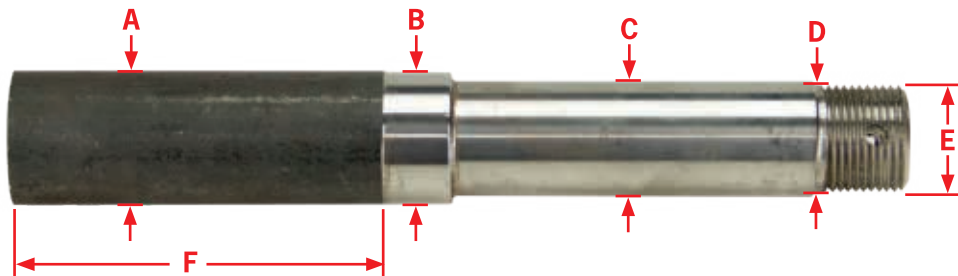

UU151000

Part #	Description	"A"	"B"	"C"	"D"	"E"
UW151000	Replacement spindle for BT16 spindle with 1 1/16 in. inner and outer bearings	1.25 in.	1.23 in.	1.062 in.	1.062 in.	1 in. -14
UW350000	Replacement spindle for #84 spindle with 1 3/8 in. inner and 1 1/16 in. outer bearings	1.75 in.	1.72 in..	1.376 in.	1.062 in.	1 in. -14





# TRAILER HARDWARE




Stocked and shipped  
from our U.S.  
Warehouse in  
Springfield, MO



TIE-DOWNS AND ROPE RINGS




Part #	Description	Load Limit	"A" Length	"B" Length	"C" Length	"D" Length
UH301125	Bolt-on ¼ in. dia. D-ring	400 lbs.	1½ in.	1⅝ in.	1⅝ in.	⅞ in.
UH302500	Bolt-on ½ in. dia. D-ring	4,000 lbs.	2 in.	3⅜ in.	2½ in.	1¾ in.
UH302625	Weld-on ⅝ in. dia. D-ring	5,000 lbs.	1¾ in.	4¼ in.	3 in.	2½ in.

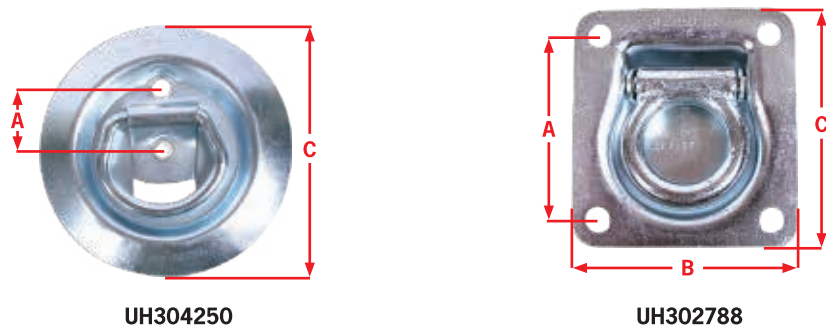

Part #	Description	Load Limit	"A" Length	"B" Length	"C" Length	Depth or Rise
UH304250	Raised surface mount ¼ in. dia. rope ring	1,500 lbs.	1 in.	n/a	4 in.	⅜ in.
UH302788	Recessed rope ring	400 lbs.	3¾ in.	4 in.	3⅝ in.	⅞ in.

ALUMINUM TIE LOOP

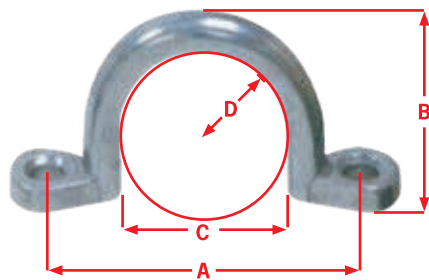


Part #	Description	"A" Length	"B" Length	"C" Length	"D" Radius
UH300500	Bolt-on ½ in. dia. tie loop	4½ in.	2¼ in.	2 in.	1 in.

MOTORCYCLE WHEEL CHOCK

Motorcycle wheel chock:

- Is made from 304 stainless steel to resist corrosion
- Is precision welded for maximum strength
- Fits most all brands of motorcycles
- Keeps motorcycle secure during transport
- Is simple to attach to most trailers
- Removes quickly and easily
- Comes with mounting hardware

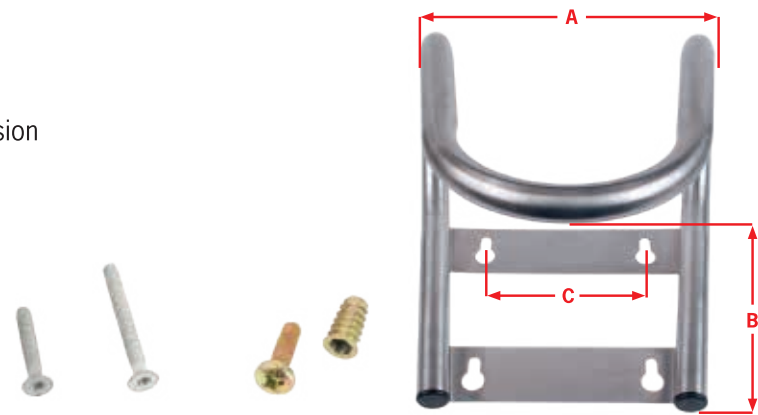

Part #	Description	"A" Length	"B" Length	"C" Length
UH410030	Treated Wood Screw pack, 1½ in. self-tapping (Qty 20)			








### SPARE TIRE CARRIER

Spare tire carrier:

- Holds 4 or 5 lug wheels
- Will fit 8 in. thru 14 in. and most 15 in. wheels
- Includes optional locking brackets and lock

Part #	Description
UH622000	Spare tire carrier without lock
UH628000	Spare tire carrier with lock and brackets

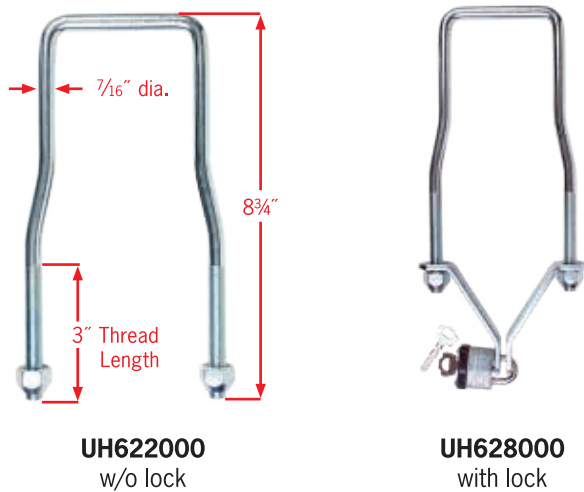

Selling point:

- Heavy-Duty Steel Construction.
- Fits most tongue and trailer frames
- Use for 8", 10", 12", 13", 14" and 15" tires — fits four-lug and five-lug wheels

Part #	Description
UH628100	Universal tongue mounted spare tire carrier, 4 or 5 lug, 4" or 4.5" BC (Carry-on 628 equiv.)

### TRAILER BRACKET




Selling point:

- It on corner bracket, use to support the corners of the sides of trailers to contain cargo in the trailer.
- Made of cold rolled steel for maximum support & safety.

Part #	Description
UH806000	Corner bracket

### CHAIN POCKET

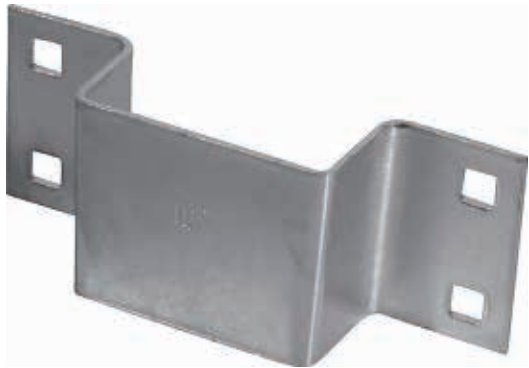


Selling point:

- Heavy-Duty Steel Construction.
- Fits most tongue and trailer frames
- Use for 8", 10", 12", 13", 14" and 15" tires — fits four-lug and five-lug wheels

Part #	Description
UH807010	Bolt on chain pocket

### STAKE POCKET

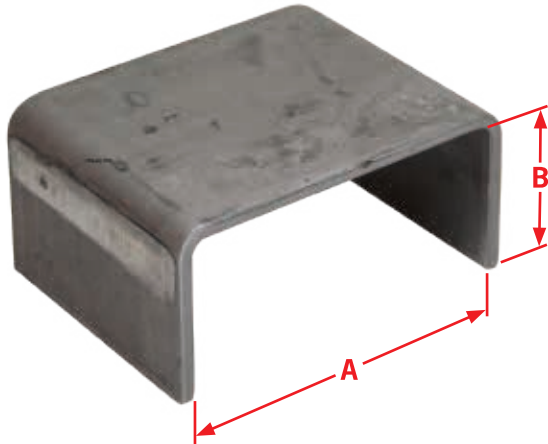

Part #	Description	"A"	"B"
UH807000	Weld-on stake pocket	3.562 in..	1.562 in.





# ELECTRICAL PARTS



Stocked and shipped  
from our U.S.  
Warehouse in  
Springfield, MO




TRAILER WIRING CONFIGURATIONS

Use wiring configuration diagrams below to help select the best harness, connector, or adaptor to fit your needs.

Vehicle wire colors may vary, so check your owners manual or use a tester to verify circuits before installing.


6-WAY ROUND ZINC DIE CAST

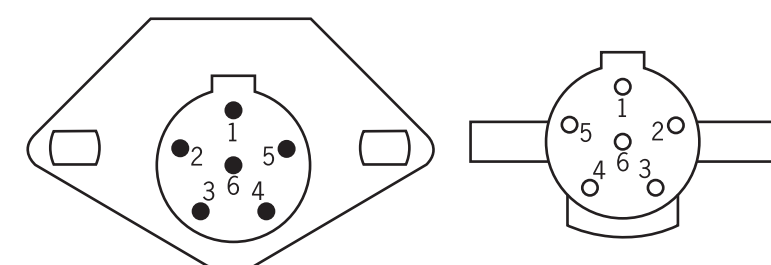

- 1) Tail lights
- 2) Ground
- 3) Left turn & Stop
- 4) Right turn & Stop
- 5) Brakes
- 6) Accessory

Applications: Horse & utility trailers with back-up lights & electric brakes.


4 OR 5-WAY FLAT CONNECTOR

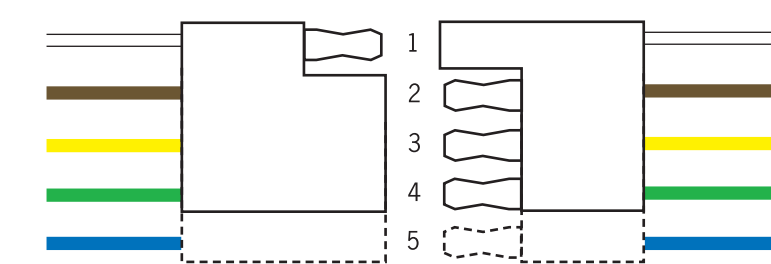

- 1) Ground
- 2) Tail lights
- 3) Left turn
- 4) Right turn
- 5) Electric brakes

Applications: Small boat or utility trailers, and any trailer with turn, tail, and brake lights.

7-WAY RV CONNECTOR

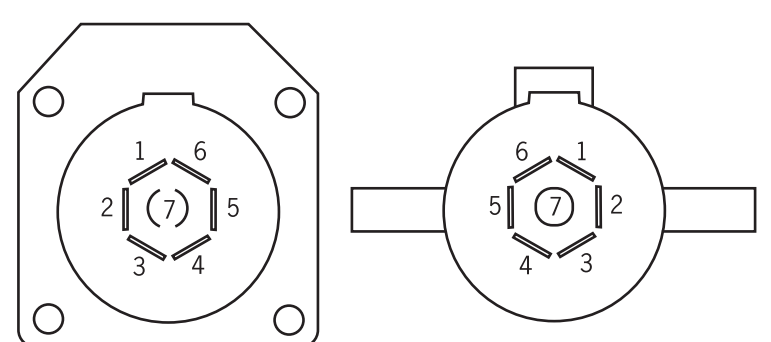

- 1) Battery
- 2) Right Turn and Stop
- 3) Electric Brake
- 4) Ground
- 5) Left Turn and Stop
- 6) Tail and Running Lights
- 7) Auxiliary Power

Applications: Small boat or utility trailers, and any trailer with turn, tail, and brake lights.

WIRE HARNESS ADAPTERS



Part #	Description
UE624000	6-pole round to 4-pole flat, plastic molded
UE724000	7-pole RV to 4-pole flat, plastic molded
UE725000	7-pole round to 5-pole flat, plastic molded
UE726000	7-pole RV to 6-pole round, plastic molded
UE424000	Adapts 4-way round vehicle connector to accept a 4-way flat trailer connector
UE724001	Adapts a 7-Pin Ag. Style vehicle connector to accept a 4-way flat trailer connector
UE726001	Adapts a 7-RV vehicle connector to accept a 6-way round trailer connector with center pin brake
UE724005	7 RV to 4-flat trailer adapter - glows red in the dark w/ easy pull grip
UE726002	Adapter, 7-RV to 6-rnd, w/brake pin switch center pin switch - aux or brake




Part #	Description
UE724020	Adapter that plugs into the vehicle OEM harness receptacle to accept either a 7-way RV or a 4-way flat trailer connector. Includes bracket and mounting hardware.
UE726500	Adapts a 7 RV vehicle connector to accept a 6 way round, 4 way flat or 5 way flat trailer connector





FLAT TRAILER WIRE CONNECTORS

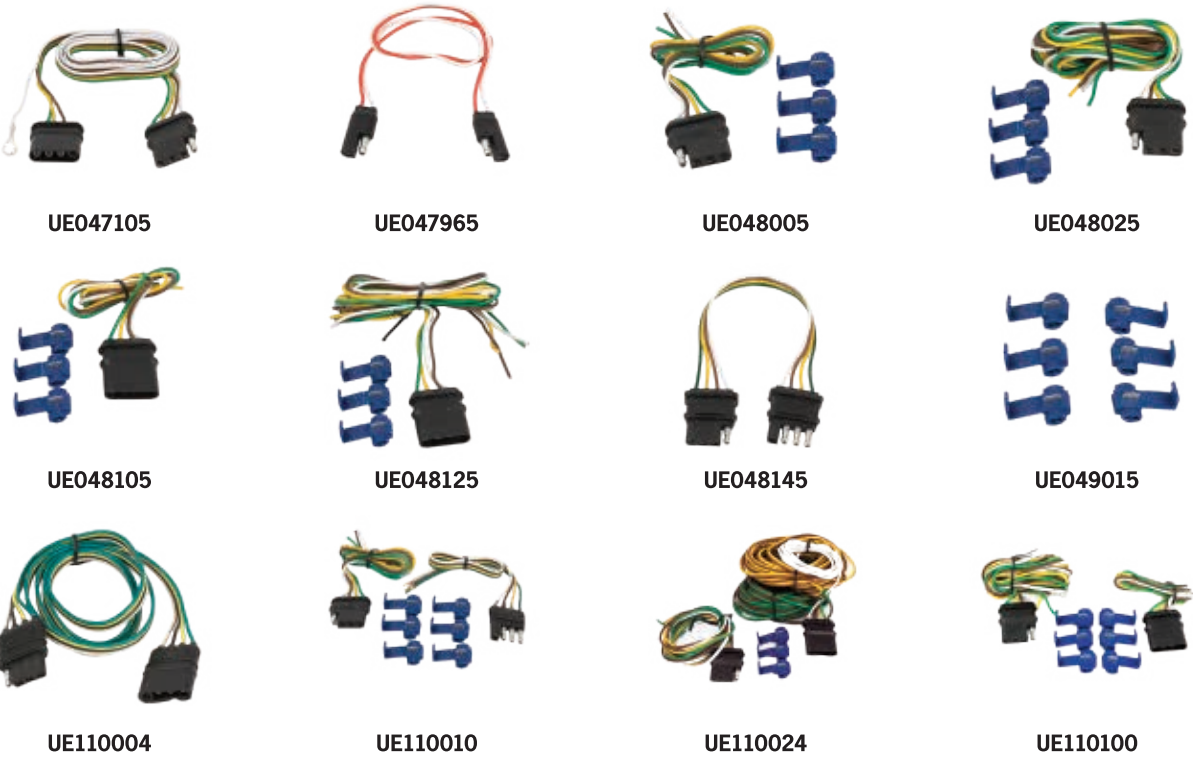

Part #	Description
UE047105	4-Pole flat extension loop with ground terminal on trailer end, 36 in. length
UE047965	2-Pole flat extension loop, 12 in. length
UE048005	4-Pole flat, vehicle end w/12 in. of wire and (3) splice connectors
UE048025	4-Pole flat vehicle end with 48 in. of wire and (3) splice connectors
UE048105	4-Pole flat, trailer end w/12 in. of wire and (3) splice connectors
UE048125	4-Pole flat trailer end with 48 in. of wire with (3) splice connectors
UE048145	4-Pole flat extension loop with integrated ground, 12 in. length
UE049015	Splice connectors for 14-18 AWG trailer wire
UE110004	4-Pole flat extension loop with integrated ground, 48 in. length
UE110010	4-Pole flat vehicle & trailer end connectors w/24 in. of total wire and (6) splices
UE110100	4-Pole flat vehicle & trailer end connectors w/60 in. of total wire and (6) splices
UE110024	4-Pole flat complete trailer wiring kit with 20 ft. of wire split for right and left trailer lights, 36 in. of vehicle wire and splice connectors

FLAT TRAILER WIRE CONNECTORS (CONTINUED)



Part #	Description
UE110000	Kit - includes UE110015 and UE110020
UE110015	Trailer end- 4-pole male connector with 12 in. wires
UE110020	Vehicle end - 4-pole flat female connector with 48 in. wires
UE500004	5-Pole flat, trailer end w/ 48 in. of extra wire
UE500005	5-Pole flat extension loop with integrated ground, 12 in. length
UE049915	Bonded 4-wire trailer wire, 16 AWG X 25 ft. long
UE049905	Bonded 4-wire trailer wire, 14 AWG X 25 ft. long

TRAILER WIRE



UE049955

Part #	Description
UE049955	Bonded 4-wire trailer wire, 16 AWG X 100 ft. long



TRAILER WIRE CONNECTORS 4, 6, AND 7 POLE



Part #	Description
UE048425	6-Pole round vehicle end plastic trailer connector
UE600000	6-Pole round vehicle end zinc die-cast trailer connector
UE600004	6-Pole round trailer end zinc die-cast trailer connector
UE700000	7-Pole Plastic trailer connector, RV vehicle end
UE700001	7-Pole round-pin agricultural style connector, trailer-end
UE700004	7-Pole Plastic trailer connector, RV trailer end
UE700005	7-Pole round-pin Agricultural style connector, vehicle-end
UE400000	4-Pole round vehicle-end connector


WIRE HARNESS CONNECTOR SETS

Available in bulk



Part #	Description
UE400010	4-Pole round vehicle and trailer-end kit
UE048465	7-Pole RV blade type kit with trailer and vehicle-end with bracket
UE600010	6-Pole round connector kit with bracket


TRAILER WIRING ACCESSORIES

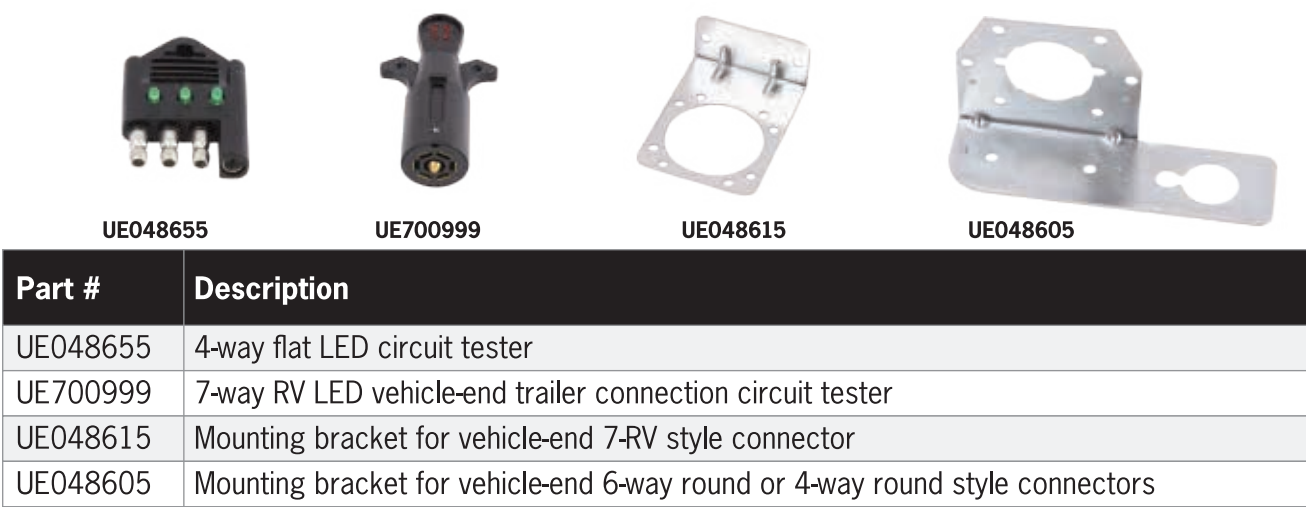

WIRE HARNESS ADAPTERS



BREAK-AWAY SWITCH, KIT AND BATTERY

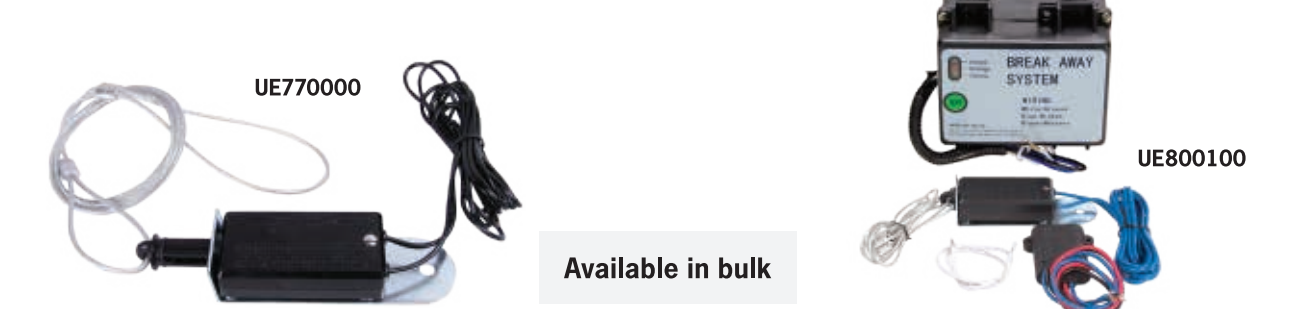

Part #	Description
UE800001	Sealed, 12VDC, 5 Amp trailer breakaway battery
UE800100	Complete trailer breakaway kit. Includes, 12VDC 5 Amp battery, breakaway switch, battery charger and side mount plastic box
UE770000	12 Volt DC breakaway switch





# TRAILER LIGHTING



Stocked and shipped  
from our U.S.  
Warehouse in  
Springfield, MO



GROMMETS AND BRACKET



UL142018



UL146018



UL154009

Part #	Description
UL142018	Rubber grommet, 2 1/2 in. open back flush mount
UL146018	Rubber grommet for 2# open back flush mount
UL154009	3 3/4 in. x 1 1/4 in. Mount Bracket For UL154 Light

TRAILER LIGHT KITS

Both kits include:

- 2 stop/tail/turn lights
- 25 ft. trailer wire harness
- 4 ft. trunk connector
- 1 License plate bracket
- All mounting hardware



Kit for 80 inch wide trailers  
UL544000



Includes 2 Amber side marker lights  
UL540000

Towing light kit features:

- Super strong, scratch resistant magnets for maximum safety
- 5 ft. span between lights to fit any vehicle
- 4-way flat harness adapter with 20 ft. of wire
- DOT approved lights for high visibility
- Functions as stop/turn/tail, and emergency flashers



UL555000

Part #	Description
UL540000	Submersible incandescent light kit with side marker lights, for trailers under 80 in.
UL544000	Submersible incandescent light kit with side marker lights for trailers over 80 in.
UL555000	Towing light kit, magnetic, 25 ft. harness

TRAILER LIGHT KITS (CONTINUED)



UL547000 - Incandescent  
UL728000 - LED



UL941000

Part #	Description
UL941000	Submersible stop/tail/turn LED light kit, for trailers under 80 in. wide w/bracket
UL547000	Submersible light kit, for trailers over 80 in. wide, low profile w/harness, lights & bracket
UL728000	Submersible LED light kit, for trailers over 80 in. wide, low profile w/harness, lights & bracket

Towing light kit features:

- Includes double-sided red brake lights and amber hazard flashers with super-bright LEDs
- Easily mounts to any vehicle being towed
- Scratch-resistant magnetic base
- Ideal for towing applications up to 80 in. wide
- 40 LEDs per light

Part #	Description
UL555100	Towing light kit, Magnetic LED W/Carrying Case



TRACTOR LIGHTS



UL503000



UL504000



UL507000

Part #	Description
UL503000	Halogen tractor light, 3 in. x 5 in. flood pattern with replaceable H3-55 W bulb
UL504000	Halogen tractor light, 4 in. x 6 in. flood pattern with replaceable H3-55 W bulb
UL507000	Tractor light, 4 in. dia. flood pattern with H7614 sealed 55 W beam



PEDESTAL MOUNTS



Part #	Description
UL313000	4 1/8 in. Round, pedestal mount, double faced incandescent - Amber/Amber
UL313003	4 1/8 in. Round, pedestal mount, double faced incandescent - Amber/Red
UL410001	4 1/8 in. Round, pedestal mount, single faced stop/turn/tail, incandescent, double wire - Red

OVAL TRAILER STOP/TURN/TAIL/BACK-UP LIGHTS

Each oval light:

- Meets all applicable SAE standards and meets or exceeds all DOT standards
- Uses standard 3-prong plugs
- Contact sockets are silicone filled to prevent corrosion
- Sealed for boat trailer usage
- Fits standard trailer light mounts



Part #	Description
UL420101	Stop/tail/turn, 7 diode LED OEM style kit w/rubber and 3-prong plug - Red
UL420201	Stop/tail/turn 6 diode LED OEM style hardwired w/grommet
UL421001	6 1/2 in. x 2 1/4 in. oval, sealed light only - Red
UL421101	Stop/tail/turn OEM style w/rubber grommet and 3-prong - Red
UL423101	6 1/2 in. x 2 1/4 in. LED oblong w/mounting flange, hard wire - Red
UL420001	Stop/Tail/Turn, 7 diode LED style light only

STOP/TURN/TAIL



Part #	Description
UL428001	3 3/4 in. Round stop/tail/turn w/license light, stud mounting w/wrap-around lens
UL428011	3 3/4 in. Round stop/turn/tail mounting w/o license light, stud mounting w/wrap-around lens - Red
UL420015	3 3/4 in. Round replacement lens, for V428 series, screw-on, Red
UL440001	Combo stop/turn/tail, 4 1/2 in. sq., Under 80 in., w/o license light, right side
UL440011	Combo stop/turn/tail, 4 1/2 in. sq., Under 80 in., w/license light, left side
UL440021	Replacement lens, 4 1/2 in. sq., for 440 light - Red
UL445001	Combo stop/turn/tail & backup 6 3/4 in. x 6 1/4 in. stud mount
UL452001	Stop/turn/tail, submersible for over 80 in. trailer, stud mount, w/o license light, right side
UL452002	Stop & tail light, over 80 in. submersible w/license light, left side
UL840001	Combo LED stop/turn/tail, 4 1/2 in. sq., under 80 in., w/o license light, right side
UL840011	Combo LED stop/turn/tail, 4 1/2 in. sq., under 80 in., w/license light, left side
UL550151	Replacement red side lens for UL440 and UL840 series
UL560151	Replacement red side lens for UL452 and UL940 series



LICENSE PLATE LIGHTS



Part #	Description
UL428090	License bracket for stud mount tail light, plastic
UL435000	Chrome license light, 2 in. between mounting holes
UL436000	2¾ in x 2 in. x 1½ in. License light, 2 in. between stud mounts
UL438000	1½ in. Round snap-in utility light/license plate light, chrome plate
UL385000	6⅜ in. x 3½ in. x 2⅛ in. H., 12 volt dome light w/switch, angled
UL391000	4⅞ in. x 2½ in. x 1¾ in. H., interior light, w/push switch

BACKUP LIGHTS

- Each oval light:
- Meets all applicable SAE standards and meet or exceed all DOT standards
  - Use standard 3-prong plugs
  - Contact sockets are silicone filled to prevent corrosion
  - Are sealed for marine use
  - Fit standard trailer light mounts



Part #	Description
UL421002	6 ½ in. x 2 ¼ in. O.E. style oval back-up light only, incandescent
UL421102	6 ½ in. x 2 ¼ in. O.E. style oval back-up light kit w/rubber grommet and 3 prong plug, incandescent
UL426002	4 in. round sealed clear backup light only, incandescent
UL426102	4 in. round sealed clear backup light kit w/rubber grommet and 3 prong plug, incandescent

TRAILER STOP/TURN/TAIL LIGHTS



Part #	Description
UL306001	4⅞ in. x 2½ in. x 1¾ in. H., stop/tail/turn light, single lead - Red
UL413001	4 in. Round stop/tail/turn, flush mount w/bracket - Red
UL417001	4 in. Round stop/tail/turn, light only - Red
UL417101	4 in. Round stop/tail/turn kit w/plug and grommet, LED 10 diode - Red
UL426001	4 in. Round sealed stop/tail/turn, incandescent - Red
UL426101	4 in. Round sealed stop/tail/turn kit w/rubber and 3-prong plug - Red



TRAILER STOP/TURN/TAIL LIGHTS (CONTINUED)



UL410021





UL445100

Part #	Description
UL410021	4 1/8 in. pedestal stop/tail/turn, 2 wire LED
UL445100	6 3/4 in. x 6 1/4 in. trailer/truck STT tight, w/ backup light, LED - red

2½" ROUND CLEARANCE & MARKER LIGHTS

Clearance and marker lights:

- Meet all applicable SAE standards and meet or exceed all DOT standards
- Use standard 2-prong plugs or are hard wired
- Contact sockets are silicone filled to prevent corrosion
- Are sealed for marine use
- Fit standard trailer light mounts

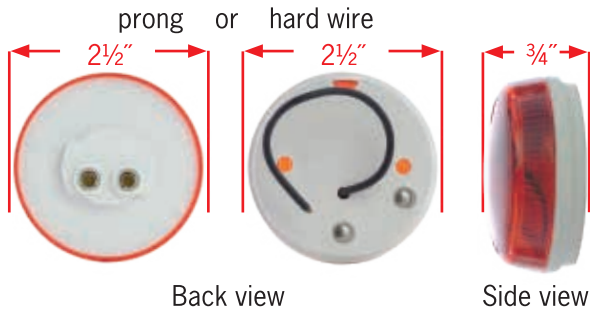

UL142000



UL142001



UL172100




UL172101

Part #	Description
UL142000	2½ in. Round clearance/marker, incandescent - Amber
UL142001	2½ in. Round clearance/marker, incandescent - Red
UL172100	2½ in. Round LED light, hard wired w/grommet - Amber
UL172101	2½ in. Round LED light, hard wired w/grommet - Red

ROUND CLEARANCE & MARKER LIGHTS (CONTINUED)

2 in. clearance and marker lights:

- Meet all applicable SAE standards and meet or exceed all DOT standards
- Use standard 2-prong plugs
- Contact sockets are silicone filled to prevent corrosion
- Are sealed for marine use
- Fit standard trailer light mounts

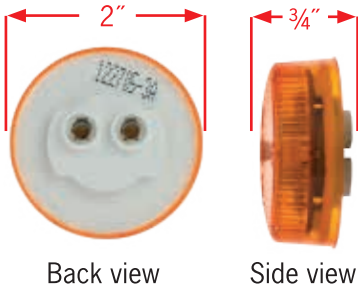

UL146000



UL164000



UL164001



UL174101

Part #	Description
UL146000	2 in. Round clearance/marker, incandescent - Amber
UL146001	2 in. Round clearance/marker, incandescent - Red
UL164000	2 in. Round sealed LED - Amber
UL164001	2 in. Round sealed LED - Red
UL174101	2 in. Round LED light, hard wired w/grommet - Red
UL174100	2 in. Round LED light, hard wired w/grommet - Amber

MARKER LIGHTS



UL154000



UL154001



UL150000

Part #	Description
UL154000	3 15/16 in. x 1 1/4 in. light clearance - Amber
UL154001	3 15/16 in. x 1 1/4 in. light Clearance - Red
UL150000	2 1/2 in. x 1 1/4 in. sealed clearance/marker light, 2-prong, light only - Amber



CLEARANCE LIGHTS


Oval clearance lights:




UL107000



UL107001

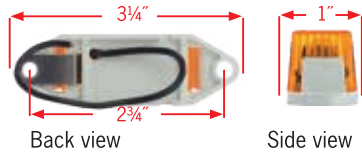


Single bulb clearance lights:



UL108000  
UL108150 - Replacement lens



UL108001  
UL108151 - Replacement lens

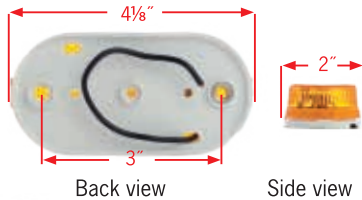


Single lead, dual bulb clearance lights:



UL135000



UL135001

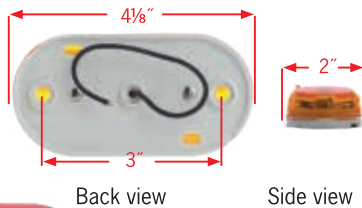

Part #	Description
UL107000	3 3/4 in. x 1 in. w/white mounting base - Amber
UL107001	3 3/4 in. x 1 in. w/white mounting base - Red
UL108000	4 1/8 in. x 2 in. Single bulb oval, w/white mounting base - Amber
UL108001	4 1/8 in. x 2 in. Single bulb oval, w/white mounting base - Red
UL135000	4 1/8 in. x 2 in. Single lead, dual bulb - Amber
UL135001	4 1/8 in. x 2 in. Single lead, dual bulb - Red

CLEARANCE LIGHTS (CONTINUED)


Single lead clearance lights:



UL136000



UL136001

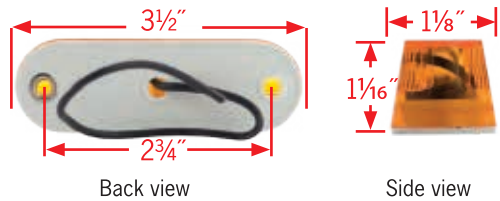


LED clearance/marker lights:




UL169100



UL169101



LED clearance light:

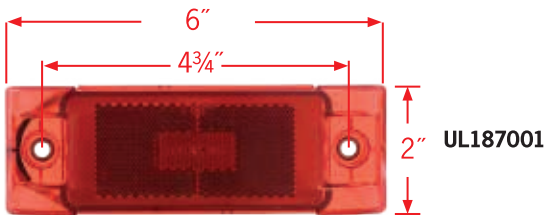

UL187001

Part #	Description
UL136000	3 1/2 in. L x 1 1/8 in. W x 1 1/16 in. H, single lead, high oval - Amber
UL136001	3 1/2 in. L x 1 1/8 in. W x 1 1/16 in. H, single lead, high oval - Red
UL169100	3 in. LED clearance/marker, 4 1/16 in. x 1 1/16 in., 2-wire, hard wired - Amber
UL169101	3 in. LED clearance/marker, 4 1/16 in. x 1 1/16 in., 2-wire, hard wired - Red
UL187001	6 in. x 2 in. LED clearance light - Red



UL110001  
Front view




Back view

Part #	Description
UL110001	Bee hive clearance light angle w/bracket - Red





CLEARANCE LIGHTS (CONTINUED)

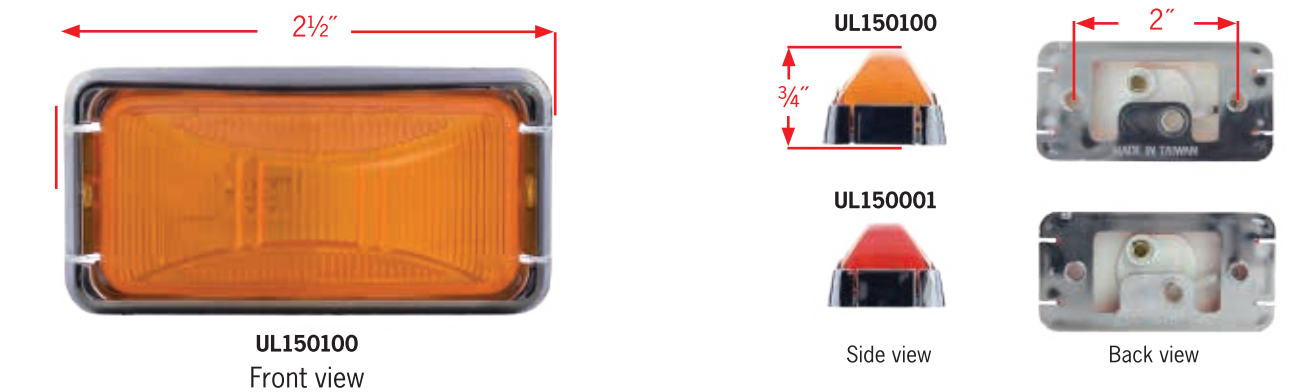

Part #	Description
UL150100	2½ in. x 1¼ in. Sealed clearance/marker light kit w/bracket, plug/screws - Amber
UL150000	2½ in. x 1¼ in. Sealed clearance/marker light, 2-prong plug, light Only - Amber
UL150001	2½ in. x 1¼ in. Sealed clearance/marker light, 2-prong plug, light Only - Red




Part #	Description
UL168100	2¾ in. x ¾ in. x 1 in. High LED clearance/marker light w/chrome bezel - Amber
UL168101	2¾ in. x ¾ in. x 1 in. High LED clearance/marker light w/chrome bezel - Red

STUD MOUNTS

Replacement Lenses :

UL550151 - red



UL550150 - amber

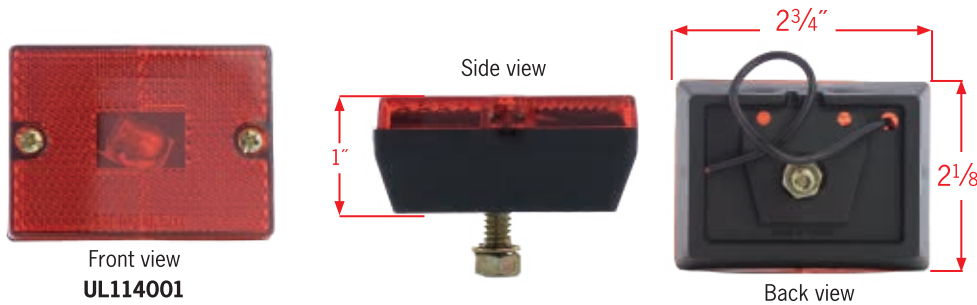

Part #	Description
UL114000	2¾ in. x 2½/8 in. x 1 in. thick, rectangular stud mount - Amber
UL114001	2¾ in. x 2½/8 in. x 1 in. thick, rectangular stud mount - Red


DOUBLE BULLS-EYE CLEARANCE LIGHT

- Double bulls-eye clearance and marker lights:
- Meet or exceed all DOT standards
  - Available in standard incandescent or super bright LED
  - Feature double bulls eye style lens
  - Use 1-wire (incandescent) or 2-wire (LED) connections
  - Snap-off lenses for easy mounting or bulb replacement (incandescent uses two #193 bulbs)

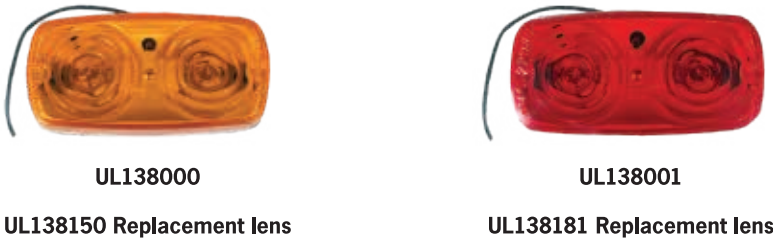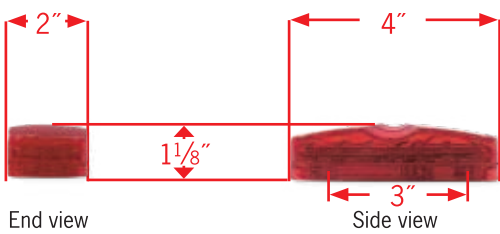

Part #	Description
UL138000	Double bulls-eye marker/clearance, incandescent - Amber
UL138001	Double bulls-eye marker/clearance, incandescent - Red
UL903000	Double bulls-eye marker/clearance, LED - Amber
UL903001	Double bulls-eye marker/clearance, LED - Red

LENS

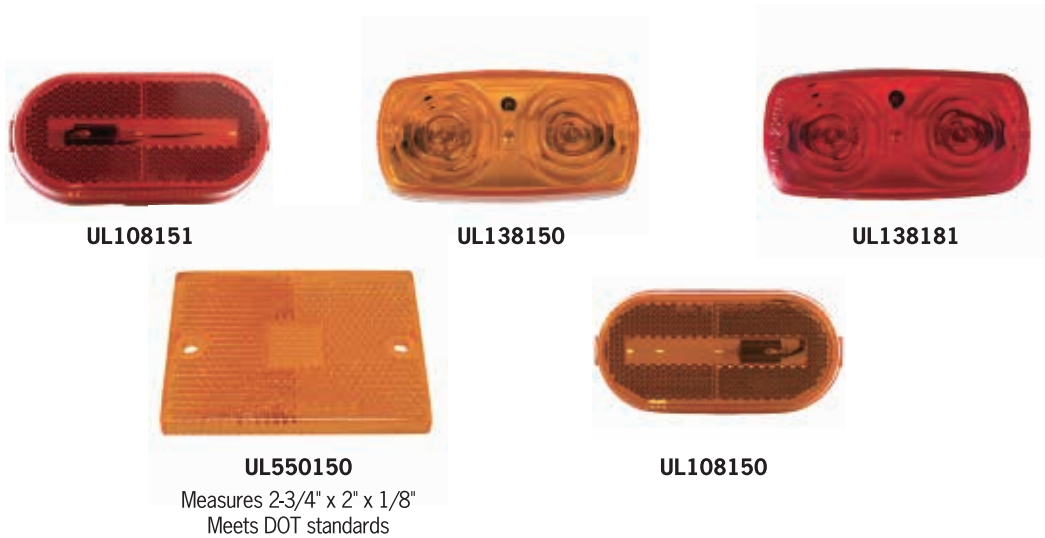


Part #	Description
UL108151	Replacement lens fits UI08000 light - Red
UL138150	Replacement lens fits UI138000 dbl bulls eye - Amber
UL138181	Replacement lens fits UI138001 dbl bulls eye - Red
UL550150	Replacement lens for UL114000 Pkgd - Amber
UL108150	Replacement lens fits UI108000 light - Amber



CONSPICUITY TAPE



UL465004  
UL465008

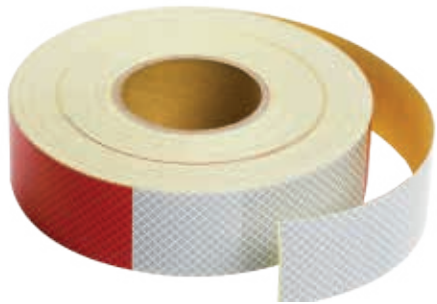

UL465500  
UL465530,501

Part #	Description
UL465004	Conspicuity tape kit, 4-pk, 12 in. strips - Red/Silver
UL465008	Conspicuity tape kit, 8-pk, 12 in. strips - Red/Silver
UL465500	Conspicuity tape, 160 ft. roll
UL465530	Conspicuity tape, 30 ft. roll
UL465501	Conspicuity tape, 21 ft. roll


ARMORED LIGHT



UL122100



Side view



Back view

Part #	Description
UL122100	4 7/8 in. x 2 1/4 in. Armored light - Amber
UL122101	4 7/8 in. x 2 1/4 in. Armored light - Red



SAFETY



- Warning Triangle Kit Set of 3 DOT warning triangles in kit case.
- Flourescent orange color triangles provide day and night visibility.
- Includes 3 snap-to-fit folding triangles with heavy duty bases and storage box

Part #	Description
UL449000	Warning Triangle Kit w/case

- Used to warn drivers there is a wagon or trailer on the road
- Bright LEDs provide safety for you and other driver
- Use as a flasher or enable continuous 'on' mode
- Use for any application that requires a safety light
- Requires 4 AA batteries (not included)



UE900100

UE900105

Part #	Description	# of Functions	LED Strength	Diameter	Battery Type
UE900100	Safety Flasher Light Magnetic - Amber	2 (Flashing & Steady)	See up to 1.25 mi. away	4" wide 6" height	AA (not included)
UE900105	Safety Flasher Light Magnetic-Red	2 (Flashing & Steady)	See up to 1.25 mi. away	4" wide 6" height	AA (not included)




MIRRORS




Part #	Description
UL600600	2 in. Round mirror, convex, stick-on
UL600603	3 in. Round mirror, convex, stick-on
UL655000	6 in. Stainless mirror w/ L-bracket, center, convex
UL809000	6 in. Convex mirror kit w/ L-bracket, center, clamp-on w/extension

REFLECTORS

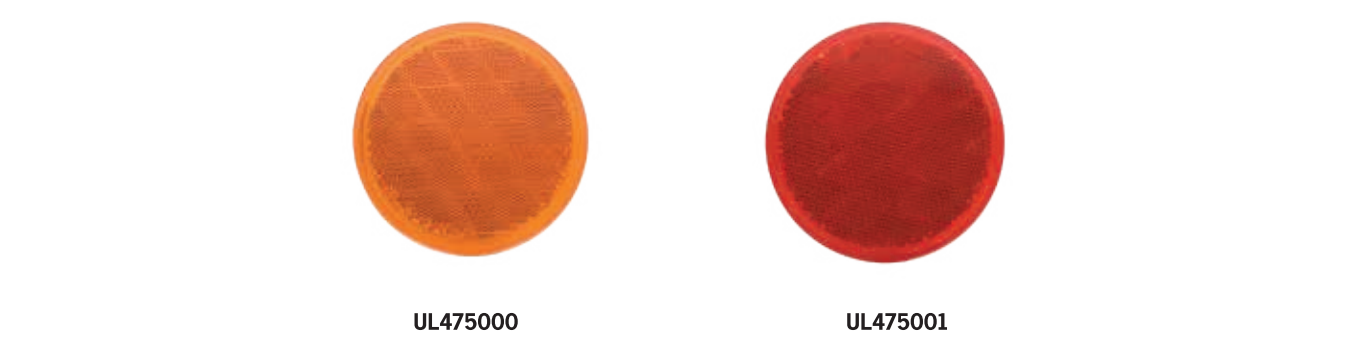

Part #	Description
UL475000	3¾ in. Round reflector, adhesive back - Amber
UL475001	3¾ in. Round reflector, adhesive back - Red

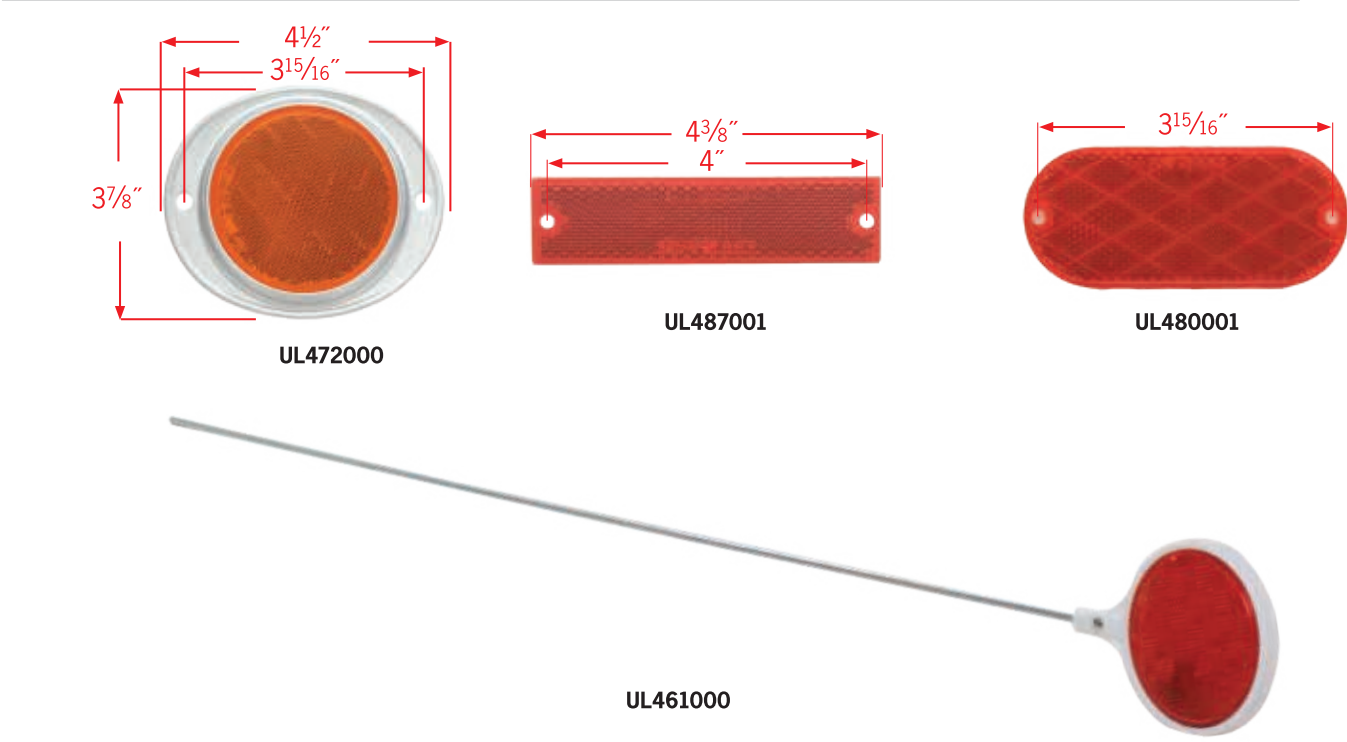


Part #	Description
UL472000	3 in. Round reflector w/aluminum mount housing - Amber
UL472001	3 in. Round reflector w/aluminum mount housing - Red
UL480000	4⅜ in. x 1⅞ in. oval reflector, adhesive back - Amber
UL480001	4⅜ in. x 1⅞ in. oval reflector, adhesive back - Red
UL487000	4⅜ in. x 1⅞ in. reflector w/mount holes, adhesive back - Amber
UL487001	4⅜ in. x 1⅞ in. reflector w/mount holes, adhesive back - Red
UL461000	36 in. long driveway marker - Red
UL461003	36 in. long driveway marker - Blue





I.D. LIGHT BARS

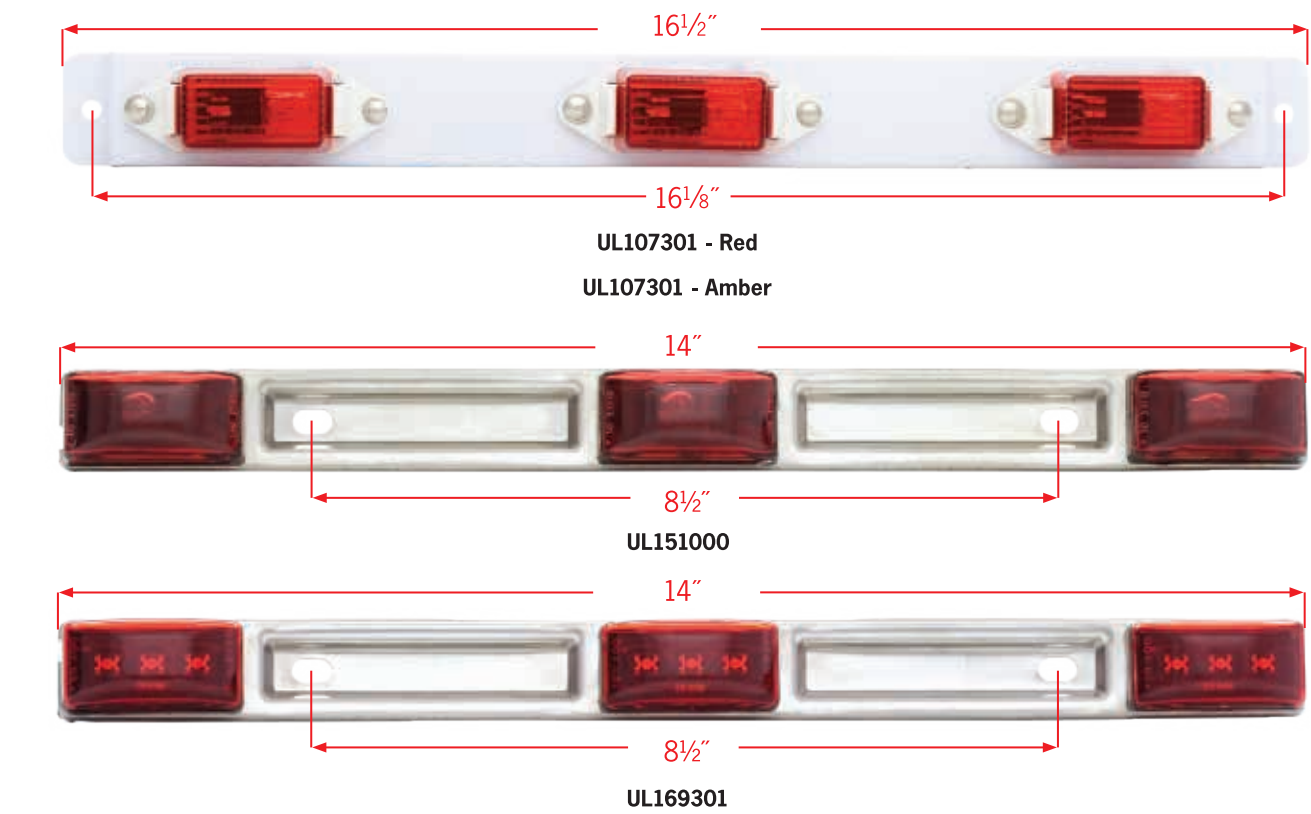


Part #	Description
UL107301	I.D. bar light, with (3) UL107001 lights w/white bracket - Red
UL151000	I.D. bar light, sealed w/silver bracket - Red
UL169301	I.D. LED bar light - Red



Part #	Description
UL107500	I.D. bar light, with (9) LED's w/chrome base - Red
UL107600	I.D. bar light, with (6) dual-red LED's w/chrome base

TRAILER LIGHT CONNECTORS

Part #	Description
UE999001	Trailer connector 2 prong plug
UE999002	Trailer connector 3 prong plug

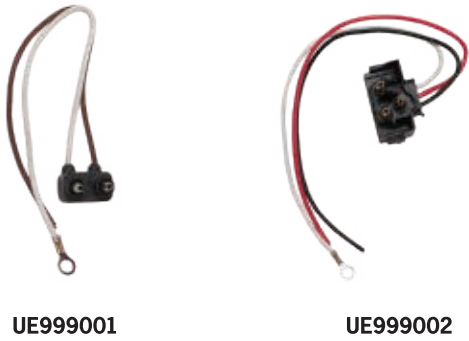

EMERGENCY ROADSIDE WARNING LIGHT



Part #	Description
UL771000	Rotating beacon light, Amber
UE900100	Magnetic safety flasher, red LED (requires (4) AA size batteries not included)
UE900105	Magnetic safety flasher, amber LED (requires (4) AA size batteries not included)





STOP/TURN/TAIL

- Flush-mount light for trailers over 80"  
Includes license illumination
- Use on left side of trailer 12V DC,  
three-wire output
- Meets or exceeds all DOT standards



Part #	Description
UL942000	Stop/tail/turn, trailer light kit, clear LED
UL942001	Stop/tail/turn light, curb side w/o License light, clear LED
UL942011	Stop/tail/turn light, street side w/license light, clear LED

BACKUP LIGHT



Part #	Description
UL417102	4 in. back-up light kit, w/grommet and plug, LED
UL420102	6 1/2 in. x 2 1/2 in. oval back-up light kit w/grommet and plug, LED

MARKER LIGHTS



- Replacement amber trailer clearance / marker light
- Measures 2-1/2" x 1-1/4"
- Mounted in chrome housing for easy installation
- Bright LEDs improve trailer visibility
- Meets or exceeds all DOT standards for trailer markers



- Pack of two 2 or 6 replacement trailer clearance / marker lights
- LED lights inside a protective black grommet
- 3/4" diameter and standard two-wire output
- Meets or exceeds all DOT standards for trailer markers
- Color: Amber/Clear



- Set of 2 or 6 red/clear LED marker lights
- Each light sealed in a protective black grommet
- Fits standard trailer light mounts
- 12V DC two-wire output
- Meets or exceeds all DOT standards for trailer markers





MARKER LIGHTS (CONTINUED)

- Replacement trailer clearance light
- Bright LEDs improve trailer visibility
- Measures 4-1/8" x 2"
- Oval design
- Color: Amber/Red



UL180000



UL180001

- Replacement trailer clearance / marker light that is sealed for boat trailer usage
- Measures 6-1/2" x 2-1/2" and fits standard trailer light mounts
- Bright LEDs improve trailer visibility
- Three-wire output
- Meets or exceeds all DOT standards for trailer markers



UL420100

Part #	Description
UL170000	3-1/8" x 2", Amber, led trailer clearance light, stud mounted.
UL170001	LED 3-1/8" x 2" clearance light - Red ,stud Mount
UL171100	LED 3/4" dia w/grommet & wire (1) pack - Amber
UL171101	LED 3/4" dia w/grommet & wire (1) pack - Red
UL171121	LED 3/4" dia Red w/grommet & wire (6) pack
UL187000	Led Amber 6 x 2" 2wire
UL153100	LED Amber 2-1/2" x 1-1/4" includes chrome base and wires
UL153101	LED Red 2-1/2" x 1-1/4" includes chrome base and wires
UL171110	LED 3/4" dia Amber w/grommet & wire (2) pack
UL171112	LED 3/4" dia Clear w/grommet & wire (2) pack
UL171120	LED 3/4" dia Amber w/grommet & wire (6) pack
UL171111	LED 3/4" dia Red w/grommet & wire (2) pack
UL171122	LED 3/4" dia Clear w/grommet & wire (6) pack
UL180000	4-1/8" Oval clearance light, LED - Amber
UL180001	4-1/8" Oval clearance light, LED - Red
UL420100	6-1/2" x 2-1/2" Marker light kit, plug/grommet, LED - Amber





# BATTERY ACCESSORIES



Stocked and shipped  
from our U.S.  
Warehouse in  
Springfield, MO



BATTERY TRAYS

- Metal Construction for maximum durability
- Ample water drain slots to reduce rust
- Heavy duty rubber coating to resist rust
- Designed to accept “J” or “L” hold down bolts
- Fits BCI 24, 27 and 31 battery groups



Part #	Description	Battery Length	Battery Width	Fits BCI Group
UV002520	Metal battery tray with rubberized coating	11 in.	7 3⁄16 in.	24
UV002530	Metal battery tray with rubberized coating	13 in.	7 3⁄16 in.	27 and 31

BATTERY BOXES

- Polypropylene molded construction for maximum water resistance
- Nylon strap and plastic buckle to secure top
- Convenient side handles for safe handling
- Top vent holes to prevent fume buildup inside of box
- Fits BCI 24, 27 and 31 battery groups



Part #	Description	Battery Length	Battery Width	Battery Height (w/terminals)	Fits BCI Group
UV030090	Battery box	11 in.	7 3⁄16 in.	9 3⁄8 in.	24
UV031890	Battery box	13 in.	7 3⁄16 in.	10 ½ in.	27 and 31


REPLACEMENT BOOSTER CABLE CLAMPS



Part #	Description	Style	Amp Rating
UV001810	Booster cable clamp copper, set of two (1) red, (1) black	Top/side mount	50 Amp.
UV001820	Booster clamp set of two, (1) red, (1) black, for both side and top post batteries, pvc coated	Top/side mount	500 Amp.
UV001840	Booster cable clamps, extra heavy duty spring tension, set of two, (1) red, (1) black	H.D. top/side mount	500 Amp.
UV003350	Booster cable clamp copper crimp, copper plated steel construction	Top/long reach side	200 Amp.

TOP POST BATTERY CABLES WITH AUXILIARY CABLE

- From 2 AWG to 6 AWG heavy duty battery cables
- Lengths from 25 in. to 72 in. w/ red or black insulation
- Fits up to 3/8 in. stud diameter
- Cables are equipped with a 8 in. long 12 AWG auxiliary cable
- For applications that require auxiliary cables

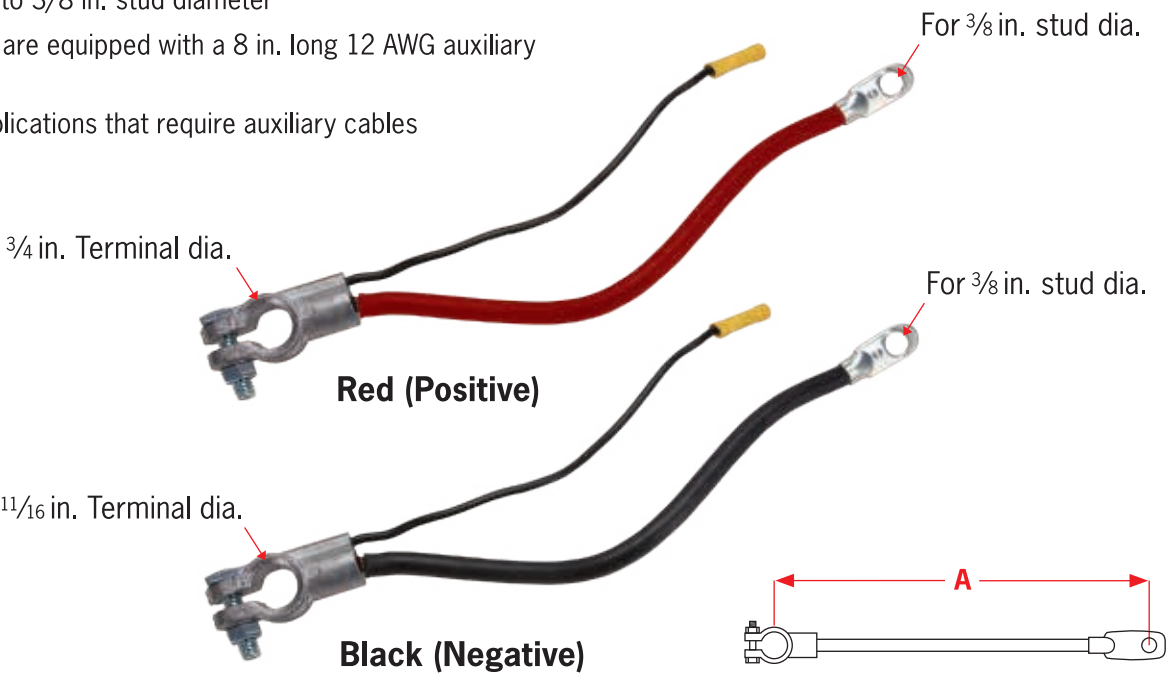

Part #	Description	“A” Length	AWG	Leads	Color
UV001730	Battery cable, top post	25 in.	2 AWG	1	Red
UV001740	Battery cable, top post	38 in.	2 AWG	1	Red
UV001770	Battery cable, top post	48 in.	2 AWG	1	Red
UV002950	Battery cable, top post	25 in.	4 AWG	1	Red
UV008020	Battery cable, top post	25 in.	4 AWG	1	Black
UV002960	Battery cable, top post	32 in.	4 AWG	1	Red
UV008030	Battery cable, top post	32 in.	4 AWG	1	Black
UV008040	Battery cable, top post	38 in.	4 AWG	1	Black
UV002980	Battery cable, top post	43 in.	4 AWG	1	Red
UV008050	Battery cable, top post	43 in.	4 AWG	1	Black



TOP POST BATTERY CABLES WITH AUXILIARY CABLE (CONTINUED)

Part #	Description	“A” Length	AWG	Leads	Color
UV003280	Battery cable, top post	56 in.	4 AWG	1	Red
UV008090	Battery cable, top post	56 in.	4 AWG	1	Black
UV008100	Battery cable, top post	72 in.	4 AWG	1	Black

SIDE MOUNT BATTERY CABLES WITH AUXILIARY CABLE


- 4 AWG heavy duty battery cables
- 40 in. Length w/ red or black insulation
- Fits up to 3/8 in. stud diameter
- Cables are equipped with an 8 in. long 12 AWG auxiliary cable
- For applications that require auxiliary cables



Part #	Description	Length	AWG	Stud Size	Color
UV008760	Side terminal mount battery cable	40 in.	4 AWG	3/8 in. dia.	Black
UV003320	Side terminal mount battery cable	40 in.	4 AWG	3/8 in. dia.	Red

TOP POST BATTERY CABLES WITHOUT AUXILIARY CABLE

- From 2 AWG to 4 AWG heavy duty battery cables
- Lengths from 10 in. to 20 in.
- Positive or negative cables available
- For applications that do not need auxiliary cables

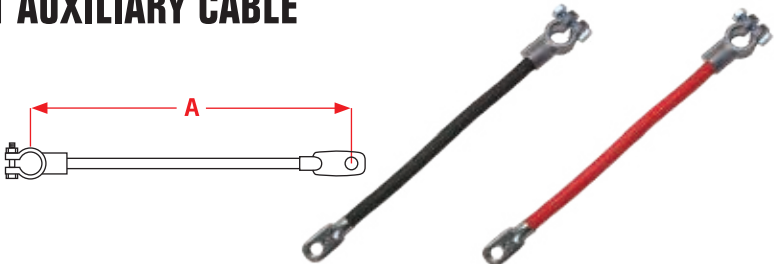


Part #	Description	“A” Length	AWG	Color
UV003650	Battery cable, top post	10 in.	2	Red
UV003068	Battery cable, top post	15 in.	2	Red
UV004056	Battery cable, top post	20 in.	2	Red
UV002930	Battery cable, top post	15 in.	4	Red
UV007850	Battery cable, top post	15 in.	4	Black

SWITCH TO STARTER CABLES - AUTO

Part #	Description	“A” Length	AWG	Stud Size	Color
UV004292	Automotive switch to starter cable	36 in.	3 AWG	3/8 in. dia.	Red
UV004298	Automotive switch to starter cable	36 in.	3 AWG	3/8 in. dia.	Black


- 4 AWG heavy duty starter cables
- Lengths from 16 in. to 49 in.
- Fits up to 3/8 in. stud diameter

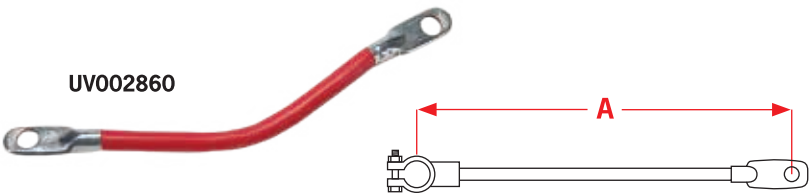

Part #	Description	“A” Length	AWG	Stud Size	Color
UV002860	Automotive switch to starter cable	16 in.	4 AWG	3/8 in. dia.	Red
UV002870	Automotive switch to starter cable	18 in.	4 AWG	3/8 in. dia.	Red
UV002880	Automotive switch to starter cable	24 in.	4 AWG	3/8 in. dia.	Red
UV002890	Automotive switch to starter cable	32 in.	4 AWG	3/8 in. dia.	Red
UV002820	Automotive switch to starter cable	40 in.	4 AWG	3/8 in. dia.	Red
UV002910	Automotive switch to starter cable	49 in.	4 AWG	3/8 in. dia.	Red

SWITCH TO STARTER CABLES - LAWN AND GARDEN

- 6 AWG Lawn and garden switch-to-starter cables
- Lengths from 19 in. to 43 in.
- Fits up to 5/16 in. stud diameter

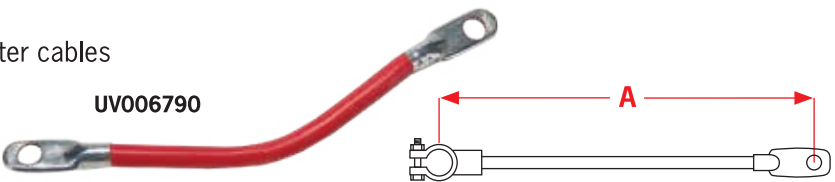


Part #	Description	“A” Length	AWG	Stud Size	Color
UV006790	Lawn & garden switch to starter cable	19 in.	6 AWG	5/16 in. dia.	Red
UV006800	Lawn & garden switch to starter cable	43 in.	6 AWG	5/16 in. dia.	Red



GROUND STRAPS

- 4 AWG Heavy duty braided tin coated copper
- 9 in.and 14 in. lengths
- Fits up to 3⁄8 in. stud diameter

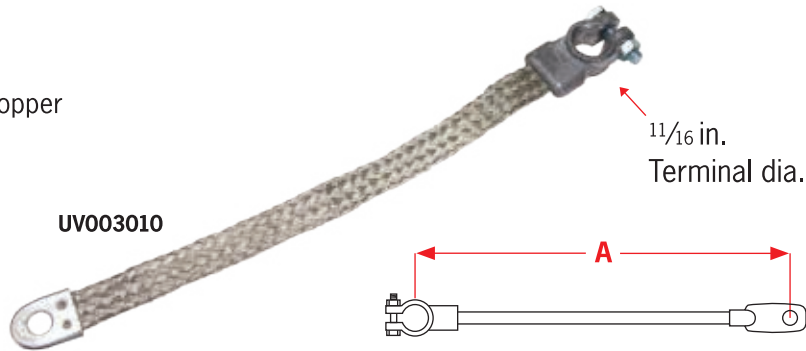

Part #	Description	“A” Length	AWG	Stud Size	Material
UV003010	Ground strap cable	9 in.	4 AWG	Up to 3⁄8 in. dia.	Tin coated copper
UV003640	Ground strap cable	14 in.	4 AWG	Up to 3⁄8 in. dia.	Tin coated copper

CRIMP-ON LUGS



Part #	Description	Wire AWG	Stud Size
UV005329	Copper lug (Qty 2)	2 AWG	3⁄8 in.
UV005330	Copper lug (Qty 2)	2 AWG	1⁄2 in.
UV005328	Copper lug (Qty 2)	4 AWG	5⁄16 in.
UV005326	Copper lug (Qty 2)	6 AWG	3⁄8 in.

BRASS AND ZINC BATTERY TERMINALS



Marine applications

Part #	Description	Material	Cable Stud Dia.	Terminal Dia.
UV001910	Quick connect universal battery terminal for top post batteries	Copper plated zinc	5⁄16 in.	1 1⁄16 in.
UV005120	Universal brass battery terminal, 2 AWG-4/0 cable	Brass	N/A	1 1⁄16 in.
UV006390	Wing nut style battery terminals, (Qty 2)	Brass	5⁄16 in.	1 1⁄16 in., 3⁄8 in.

LEAD BATTERY TERMINALS



Part #	Description	Cable	Cable Stud Dia.	Terminal Dia.
UV001480	Universal marine battery terminal set with wing nut cable mount, (1) red, (1) black, cast lead construction	N/A	Red: 3⁄8 in. Blk: 5⁄16 in.	Red: 3⁄4 in. Blk: 1 1⁄16 in.
UV003500	Top post terminal, heavy duty, cast lead construction	1-6 AWG	5⁄16 in.	1 1⁄16 in.
UV003510	Side terminal replacement, with 3⁄8” bolt	1-6 AWG	3⁄8 in. Thread	N/A
UV003540	Universal marine battery terminal w/wing nut (Qty 2)	N/A	5⁄16 in.	Universal: 3⁄4 in. or 1 1⁄16 in.
UV003660	Heavy-duty top post terminal	2 AWG - 4/0	N/A	Universal: 3⁄4 in. or 1 1⁄16 in.
UV003067	Replacement battery terminal Kit	1-6 AWG	N/A	Red: 3⁄4 in. Blk: 1 1⁄16 in.



- Adapts a standard top-post battery to a side-post battery
- Side-mount holes accept standard 3/8" screw
- Cast-lead construction

Part #	Description
UV003530	Battery term adapter top post to side pop

BATTERY TERMINAL PROTECTORS



Part #	Description
UV006840	Universal battery terminal protective caps, (1) red, (1) black
UV001253	Universal top/side terminal protectors, (1) red, (1) black



BATTERY BOLTS, EXTENDERS AND CHARGING POSTS



Part #	Description	Length	Thread	Qty.
UV001900	Side mount bolt extenders for attaching charger and jumper cables, (1) black and (1) red	½ in. extension	¾ in. - 18	2
UV003520	Side terminal charging post	½ in. extension	¾ in. - 18	2
UV001930	Bolt and nut for garden tractor, fits U1 batteries	¾ in.	¼ in. - 20	2
UV003240	Battery bolt with nut	1¼ in.	5⁄16 in. - 18	2
UV003250	Side term bolt battery	½ in.	¾ in. - 14	2
UV053040	Side term bolt battery	½ in.	¾ in. - 18	2

BATTERY/ANTIFREEZE TESTERS




Part #	Description	Type
UV002310	Battery hydrometer with heavy duty float indicator, temperature correcting	Glass tube
UV002340	Anti-freeze tester	Dial

BATTERY TERMINAL CLEANERS

- Keep battery connections clean and free of corrosion for optimum performance.
- Kit includes:
  - 1) Battery terminal and post cleaner, 1 1⁄8 oz.
  - 2) Battery cleaner spray, ¾ oz.
  - 3) Battery terminal protection spray, alcohol wipe and complete instructions.



Part #	Description
UV003170	Cleaner Protector Battery Kit

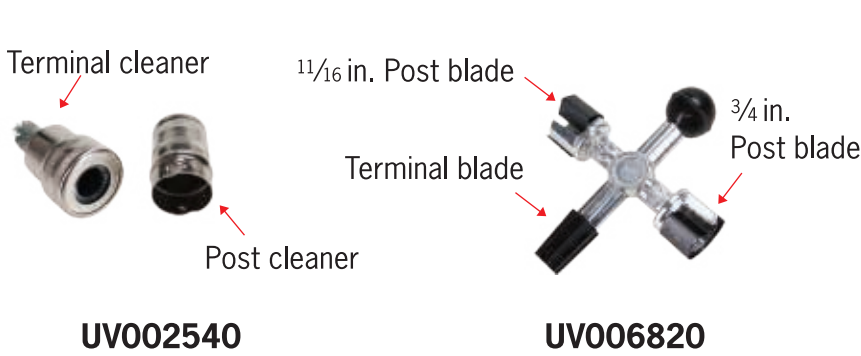

Part #	Description	O.D. Terminal Dia. Sizes	I.D. Terminal Size
UV003200	Battery protection spray, 7.5 oz. can	N/A	
UV003210	Battery cleaner spray, 11 oz can	N/A	
UV002540	Battery top post and terminal cleaning tool with wire cleaning action	¾ in. and 1 1⁄16 in.	¾ in. and 1 1⁄16 in.
UV006820	Battery terminal clean and cut tool with 3-way blade action	¾ in. and 1 1⁄16 in.	¾ in. and 1 1⁄16 in.

BATTERY TOOLS

Part #	Description	Type	Length
UV001970	Battery carrier vinyl strap	Terminal attachment	17 ½ in.





BATTERY AND CHARGING CLIPS

Insulated Charging Clip Sets



UV006146



UV006147



UV006148

Un-insulated Charging Clip Sets




UV005040

Insulated Alligator Clip Sets



UV006149



Part #	Description	“A” Length	Insulation	Amp Rating
UV005040	Jaw-type clamp (Qty 2)	2 ¾ in.	None	30 Amp
UV006146	Charging clip, set (1) red, (1) black	2 ½ in.	PVC	10 Amp
UV006147	Charging clip, set (1) red, (1) black	2 ¾ in.	PVC	20 Amp
UV006148	Charging clip, set (1) red, (1) black	3 in.	PVC	30 Amp
UV006149	Alligator clip, set (1) red, (1) black	1 ½ in.	PVC	10 Amp

POWER CUT OFF

- Insulated metal & plastic power cut-off switch used for 12V DC circuits
- Maximum amp draws: 50 continuous, 300 surge
- Zinc-plated steel nuts and brass washers for battery cable mounting
- Rubber cover protects key holes when not in use

Part #	Description
UV418600	switch on/off cut off 300 amp w/ 1 keys



BATTERY HOLD-DOWNS



Part #	Description	Type	“A” Bolt Length
UV002360	Cross bar battery hold-down, 6 7⁄8 in. wide	L-bolt with top hold-down	8 in.
UV002420	Universal battery hold down, (Kit 2)	J-bolt	10 ¼ in.
UV002440	Universal battery hold down, (Kit 2)	J-bolt	12 ¼ in.
UV009160	Universal battery hold down, (Kit 2)	J-bolt	8 in.
UV002430	Universal battery hold down, (Kit 2)	L-bolt	10 ¼ in.
UV002500	Adjustable universal crossbar, adjusts 5 ½ in. to 8 ½ in. wide	L-Bolt with adjustable top hold-down	8 in.
UV006780	General Motors universal base mount	J-bolt	10 ¼ in.







# AUTOMOTIVE ELECTRICAL



Stocked and shipped  
from our U.S.  
Warehouse in  
Springfield, MO



TESTERS



Part #	Description	Voltage Rating	Type	Insulated
UA663170	Hi-low tester w/ 3 watt bulb	6-12 V DC	Wire piercing	Yes
UA663160	Hi-low tester w/ 3 watt bulb-tinted handle	6-12 V DC	Wire piercing	Yes
UE727010	Test light	12 V DC	Wire piercing	No
UA663050	H.D. circuit tester	6-24 V CD	Wire piercing	Yes



Part #	Description	Voltage Rating	Functions
UA663180	LED battery/alternator analyzer w/magnetic back	5-15 V DC	Low /normal/strong alternator and poor/fair/good battery check

SPADE TERMINALS \*



Part #	Description	Stud Size	Type	Wire Range	Color
UA610500	Spade terminal	#8 Stud	PVC	22-18 AWG	Red
UA611400	Spade terminal	#8 Stud	PVC	16-14 AWG	Blue
UA611500	Spade terminal	#10 Stud	PVC	16-14 AWG	Blue
UA612900	Spade terminal	#10 Stud	PVC	12-10 AWG	Yellow
UA613370	Spade terminal	#8, #10 Stud	PVC	22-10 AWG	Assorted
UA657160	Spade terminal	#10 Stud	Heat shrink	16-14 AWG	Blue
UA657290	Spade terminal	#10 Stud	Heat shrink	12-10 AWG	Yellow

RING TERMINALS \*



Part #	Description	Stud Size	Type	Wire Range	Color
UA610300	Ring terminal	#8 Stud	PVC	22-18 AWG	Red
UA610400	Ring terminal	#10 Stud	PVC	22-18 AWG	Red
UA610900	Ring terminal	#8 Stud	PVC	16-14 AWG	Blue
UA611100	Ring terminal	¼ in. Stud	PVC	16-14 AWG	Blue
UA612300	Ring terminal	#10 Stud	PVC	12-10 AWG	Yellow
UA612400	Ring terminal	¼ in. Stud	PVC	12-10 AWG	Yellow
UA612600	Ring terminal	¾ in. Stud	PVC	12-10 AWG	Yellow
UA657040	Ring terminal	#10 Stud	Heat shrink	22-18 AWG	Red
UA611200	Ring terminal	5/16 in. Stud	PVC	16 -14 AWG	Blue
UA612700	Ring terminal	½ in. Stud	PVC	12-10 AWG	Yellow
UA692500	Ring terminal	5/16 in. Stud	PVC	12-10 AWG	Yellow


BUTT SPLICES



Part #	Description	Type	Wire Range	Color
UA610100	Butt splices, 12V DC	PVC	22-18 AWG	Red
UA610700	Butt splices, 12V DC	PVC	16-14 AWG	Blue
UA612100	Butt splices, 12V DC	PVC	12-10 AWG	Yellow
UA613350	Butt splices, 12V DC	PVC	22-10 AWG	Assorted
UA657010	Butt splices, 12V DC	Heat Shrink	22-18 AWG	Red
UA657070	Butt splices, 12V DC	Heat Shrink	16-14 AWG	Blue
UA657210	Butt splices, 12V DC	Heat Shrink	12-10 AWG	Yellow



TAB DISCONNECTS

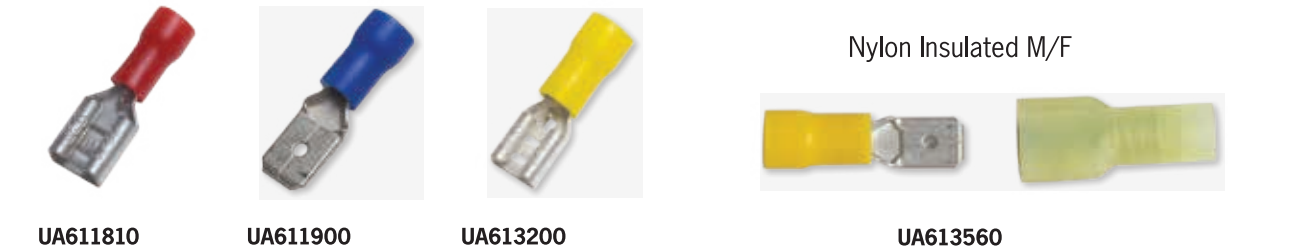

Part #	Description	Tab Size	Type	Wire Range	Color
UA611810	Tab disconnects, F, 12V DC	¼ in. Tab	PVC	22-18 AWG	Red
UA611910	Tab disconnects, M, 12V DC	¼ in. Tab	PVC	22-18 AWG	Red
UA611800	Tab disconnects, F, 12V DC	¼ in. Tab	PVC	16-14 AWG	Blue
UA611900	Tab disconnects, M, 12V DC	¼ in. Tab	PVC	16-14 AWG	Blue
UA613200	Tab disconnects, F, 12V DC	¼ in. Tab	PVC	12-10 AWG	Yellow
UA613300	Tab disconnects, M, 12V DC	¼ in. Tab	PVC	12-10 AWG	Yellow
UA613310	Tab disconnects,M/F, 12V DC	¼ in. Tab	PVC	22-10 AWG	Assorted
UA613520	Tab disconnects, M/F, two sets, 12V DC	¼ in. Tab	Nylon	22-18 AWG	Red
UA613550	Tab disconnects, M/F, two sets, 12V DC	¼ in. Tab	Nylon	16-14 AWG	Blue
UA613560	Tab disconnects, M/F, two sets, 12V DC	¼ in. Tab	Nylon	12-10 AWG	Yellow
UA612000	Male bullet connector	.157 Dia.	PVC	16-14 AWG	Blue
UA612070	Female bullet connector	.157 Dia.	PVC	16-14 AWG	Blue

TOOLS & KITS




Part #	Description	Type	Wire Range	Specifications
UA051010	Spade, ring, butt assortment	Assortment	22-10 AWG	Variety
UA051020	Terminal kit w/crimp tool	Crimp tool kit	10-22 AWG	Long-nose crimper
UA051250	Terminal kit w/crimp tool	Crimp tool kit	10-22 AWG	Cuts, crimps, strips

TOOLS & KITS




Part #	Description	Type	Wire Range	Specifications
UA662090	Auto-adjust wire stripper/crimper	Strip/crimp	10-22 AWG	Self adjusts
UA662180	Wire stripper/crimper, chrome, professional	Strip/crimp	10-22 AWG	Chrome plated
UA662170	Crimp tool, long reach	Strip/crimp	10-22 AWG	Long reach
UE727020	Wire stripper/cutter/crimper, plier nose	Cushion grip	14-16 AWG	Strip 10-18 AWG Crimp 14-16 AWG

WIRE CONNECTORS

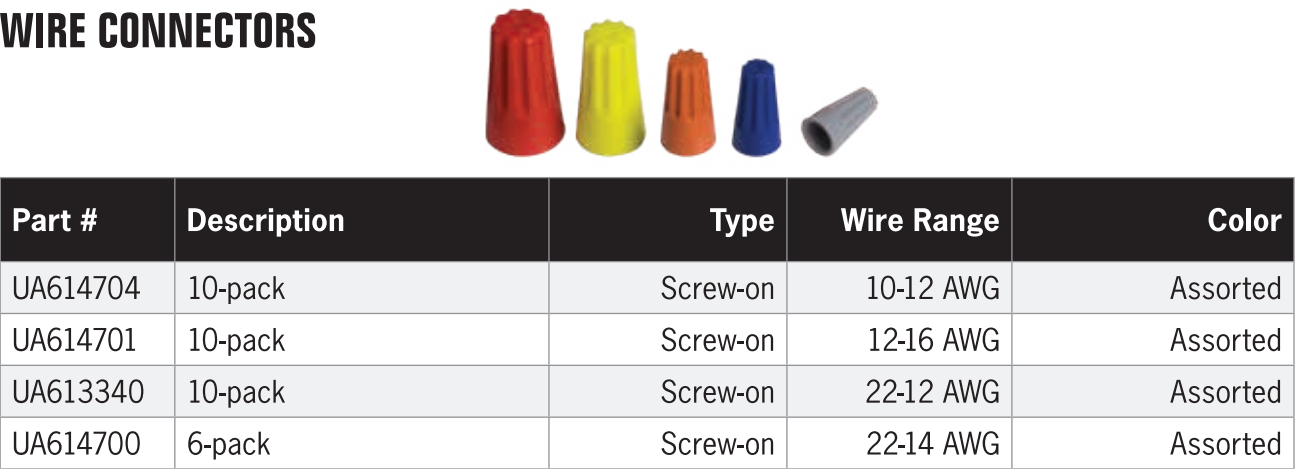

HEAT SHRINK

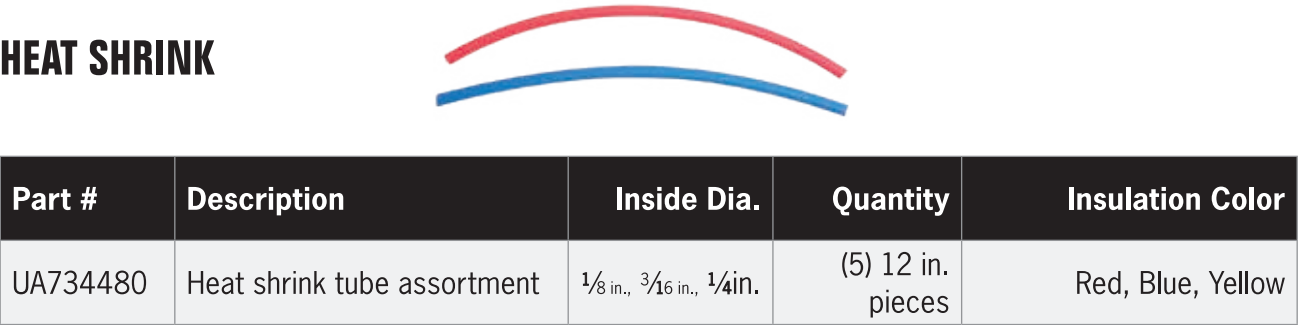

Part #	Description	Inside Dia.	Quantity	Insulation Color
UA734480	Heat shrink tube assortment	1⁄8 in., 3⁄16 in., 1⁄4 in.	(5) 12 in. pieces	Red, Blue, Yellow



LUGS & COMPRESSION TERMINALS



Compression Lug



Closed-End Crimp

Part #	Description	Size & Range	Tab Dia./ Opening	Rating
UA616060	Compression lug, 12V DC	4 AWG	3⁄8 in.	90 Amp
UA616070	Compression lug, 12V DC	2 AWG	3⁄8 in.	90 Amp
UA613400	Closed end crimp	22-18 AWG	.094 in.	N/A
UA613500	Closed end crimp	22-14 AWG	.118 in.	N/A
UA613555	Closed end crimp	22-10 AWG	.157 in.	N/A

QUICK SPLICE



Part #	Description	Wire Range	Insulation Color
UA613600	Quick splice	18-14 AWG	Blue

SPLIT FLEX TUBE



Part #	Description	Inside Dia.	Length
UA734550	Split flex tubing	3⁄8 in.	6 ft.
UA734560	Split flex tubing	1⁄2 in.	4 ft.
UA734570	Split flex tubing	3⁄4 in.	3 ft.

TERMINAL BLOCK



Part #	Description	Wire Range	Type
UA084520	Terminal block	22-10 AWG	(4) Circuit 12-volt, DC screw type

BULK AND PACKAGED WIRE



UA521870



UA813900



UA501820



UA521050



UA501050



UA521070



UA521220



UA521820



UA521850

\* Additional wire sizes, lengths, colors and package types are available at your request!

Part #	Wire Type	Wire Gauge	Length	Color	Pkg Type
UA501050	Primary stranded	10 AWG	8 ft.	Red	Clamshell
UA501070	Primary stranded	10 AWG	8 ft.	Black	Clamshell
UA501210	Primary stranded	12 AWG	12 ft.	Blue	Clamshell
UA501220	Primary stranded	12 AWG	12 ft.	White	Clamshell
UA501230	Primary stranded	12 AWG	12 ft.	Green	Clamshell
UA501240	Primary stranded	12 AWG	12 ft.	Yellow	Clamshell
UA501250	Primary stranded	12 AWG	12 ft.	Red	Clamshell
UA501270	Primary stranded	12 AWG	12 ft.	Black	Clamshell
UA501280	Primary stranded	12 AWG	12 ft.	Orange	Clamshell
UA501410	Primary stranded	14 AWG	20 ft.	Blue	Clamshell
UA501420	Primary stranded	14 AWG	20 ft.	White	Clamshell
UA501430	Primary stranded	14 AWG	20 ft.	Green	Clamshell
UA501440	Primary stranded	14 AWG	20 ft.	Yellow	Clamshell
UA501450	Primary stranded	14 AWG	20 ft.	Red	Clamshell
UA501460	Primary stranded	14 AWG	20 ft.	Brown	Clamshell
UA501470	Primary stranded	14 AWG	20 ft.	Black	Clamshell
UA501480	Primary stranded	14 AWG	20 ft.	Orange	Clamshell
UA501610	Primary stranded	16 AWG	30 ft.	Blue	Clamshell
UA501620	Primary stranded	16 AWG	30 ft.	White	Clamshell
UA501630	Primary stranded	16 AWG	30 ft.	Green	Clamshell



BULK AND PACKAGED WIRE (CONTINUED)

Part #	Wire Type	Wire Gauge	Length	Color	Pkg Type
UA501640	Primary stranded	16 AWG	30 ft.	Yellow	Clamshell
UA501650	Primary stranded	16 AWG	30 ft.	Red	Clamshell
UA501660	Primary stranded	16 AWG	30 ft.	Brown	Clamshell
UA501670	Primary stranded	16 AWG	30 ft.	Black	Clamshell
UA501830	Primary stranded	18 AWG	40 ft.	Green	Clamshell
UA501850	Primary stranded	18 AWG	40 ft.	Red	Clamshell
UA501870	Primary stranded	18 AWG	40 ft.	Black	Clamshell
UA521230	Primary stranded	12 AWG	100 ft.	Green	Spool
UA521240	Primary stranded	12 AWG	100 ft.	Yellow	Spool
UA521250	Primary stranded	12 AWG	100 ft.	Red	Spool
UA521270	Primary stranded	12 AWG	100 ft.	Black	Spool
UA521420	Primary stranded	14 AWG	100 ft.	White	Spool
UA521430	Primary stranded	14 AWG	100 ft.	Green	Spool
UA521440	Primary stranded	14 AWG	100 ft.	Yellow	Spool
UA521450	Primary stranded	14 AWG	100 ft.	Red	Spool
UA521470	Primary stranded	14 AWG	100 ft.	Black	Spool
UA521620	Primary stranded	16 AWG	100 ft.	White	Spool
UA521650	Primary stranded	16 AWG	100 ft.	Red	Spool
UA521670	Primary stranded	18 AWG	100 ft.	Black	Spool
UE049955	Bonded trailer cable	14 AWG; 4 wire	100 ft.	Wht/brn/yel/grn	Spool
UE049975	Stranded trailer cable	16 AWG; 6 wire round	250 ft.	Yel/red/grn/brwn/blue/blk	Spool
UA501820	Primary stranded	18 AWG	40 ft.	White	Clamshell
UA521050	Primary stranded	10 AWG	75 ft.	Red	Spool
UA521070	Primary stranded	10 AWG	75 ft.	Black	Spool
UA521220	Primary stranded	12 AWG	75 ft.	Black	Spool
UA521820	Primary stranded	18 AWG	75 ft.	Black	Spool
UA521850	Primary stranded	18 AWG	75 ft.	Black	Spool
UA521870	Primary stranded	18 AWG	75 ft.	Black	Spool
UA813900	2 -Conductor	14 AWG	25 ft.	Red/Black	Spool

IGNITION & PUSH BUTTON SWITCHES



UA424100




UA401930



UA422100



UA418400

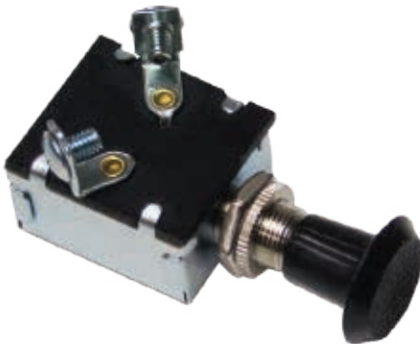

UA422000

Part #	Description	Switch Type	Amp	Positions
UA424100	Ignition switch with key, 12 V DC	4-position	30 A	Acc/off/ign/start
UA401930	Horn button, black, w/ hardwre 12 V DC	Push-horn	5 A	Moment-horn
UA422100	Momentary, brass/chrome, 12 V DC	Push-on	15 A	Moment-on
UA418400	Momentary, black, 12 V DC	Push-on	60 A	Moment-on
UA422000	Push-pull switch, 12 V DC	Push-pull	15 A	Off-on



TOGGLE & ROCKER SWITCHES



UA400900



UA417200



UA417000



UA402100



UA417800



UA403600



UA418000

Part #	Description	Switch Type	Amp	Positions
UA400900	Toggle switch, chrome, 12 V DC	Duckbill toggle	20 A	Off-On
UA402100	Toggle switch, red, 12 V DC	Illuminated toggle	20 A	Off-On
UA402400	Toggle switch, blue, 12 V DC	Illuminated toggle	20 A	Off-On
UA417700	Toggle switch, H.D., 12 V DC	Toggle	35 A	Off-On
UA417000	Toggle switch, 12 V DC	Toggle	15 A	Off-On
UA451000	Toggle switch, Ni/Brass, 12 V DC	Toggle	20 A	Off-On
UA417200	Toggle switch, 12 V DC	Toggle	10 A	Off-On
UA417800	Toggle switch, On-Off-On, H.D.	Toggle	20 A	On-Off-On
UA403600	Rocker switch, red, Rnd. mnt., 12V DC	Rocker switch	20 A	Off-On
UA403100	Rocker switch, red, Sq. mnt., 12V DC	Rocker switch	20 A	Off-On
UA418000	Toggle switch 50 amp sp-st w/ 4 water proof boots bulk	Toggle	N/A	On-Off

ACCESSORIES



UA703030



UA703150



UA613020



UA703060

Part #	Description	Product Type	Specifications
UA703030	18-10 AWG, 12 V DC	Test clips (2)	30 A insulated
UA703150	Alligator clip set w/30" wire, red and black	Test leads (2)	Non-insulated
UA613020	Alligator clip, set of two	Alligator clips (2)	Non-insulated
UA703060	18-10 AWG, H.D.	Battery clip	30 Amp insulated

ACCESSORIES (CONTINUED)



UA493050

Part #	Description	Product Type	Specifications
UA493050	Electrical tape, UL & CSA approved	Electrical PVC	30' roll



UA081000



UA081200



UA081300

Part #	Description	Amp Rating	Fuse
UA081000	Fuse holder w/ fuse	10 Amp	Yes
UA081200	Fuse holder w/ fuse	20 Amp	Yes
UA081300	Fuse holder w/ fuse	30 Amp	Yes





**Uriah Products, LLC.**  
**A Forcome Company**

Add: 2835 East Jean Street, Springfield, MO 65803

Tele: (417)986-1692

Email: [sales@uriahproducts.com](mailto:sales@uriahproducts.com)

[www.forcome.com](http://www.forcome.com) / [www.alumatow.com](http://www.alumatow.com) / [www.uriahproducts.com](http://www.uriahproducts.com)